

BZL
MIG/MAG SERIES



Welding Tools for the Professional

A Smart Approach

Parker Torchology is shaped by people with vision, a passion for improvement and a belief in delivering the very best Welding and Cutting Torch Range in the World.

We expect a great deal from our products, so we ask a lot of ourselves and our engineers.

Our mantra: **Innovation, Technology, Performance.**



DNA

Design and Engineering excellence are at the core of everything we do.

Every torch we build is driven by our relentless pursuit of perfection.

Premium Features

At Parker Torchology we do things differently, we strive to solve your problems with the perfect product to suit your needs. We create smart product features encased in cutting-edge design to ensure you always have the best tools to hand.





Production


A fusion of precision production engineering, our bespoke processing techniques and a fanatical attention to detail ensures every welding torch we produce is worthy of the Parker Torchology name.

Testing, Testing, Testing

It takes patience to develop a new product, it's a lot more than a great idea.

Product development is an iterative process, trying something over and over, changing one small variable at a time.


We build endless prototypes and test pieces that undergo months of rigorous testing. Only once a product has passed up to 88 different test procedures, with every single part tested separately do we consider our latest designs ready for market.

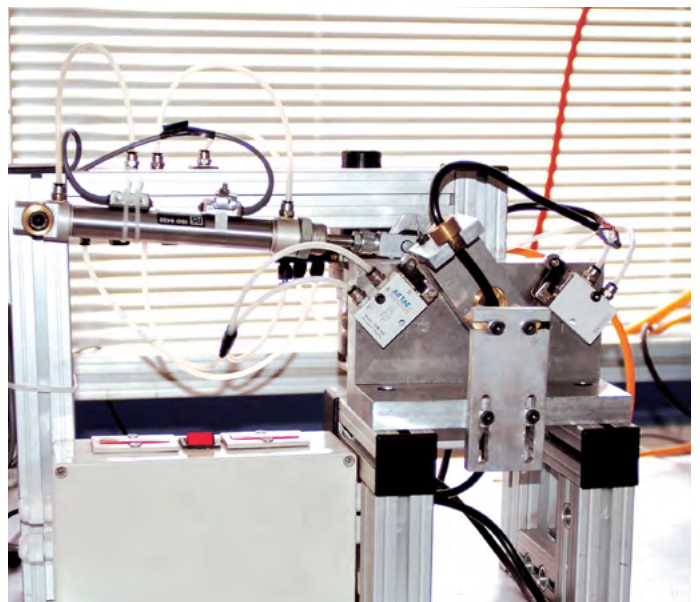

Partners

Our customers and business partners play a vital role in our development. With the core aim to strive together, we work with end users, distributors and academic institutions alike.

As a result we share fundamental values in order to succeed in our respective market places, supporting economic growth and collaborative opportunities with others.

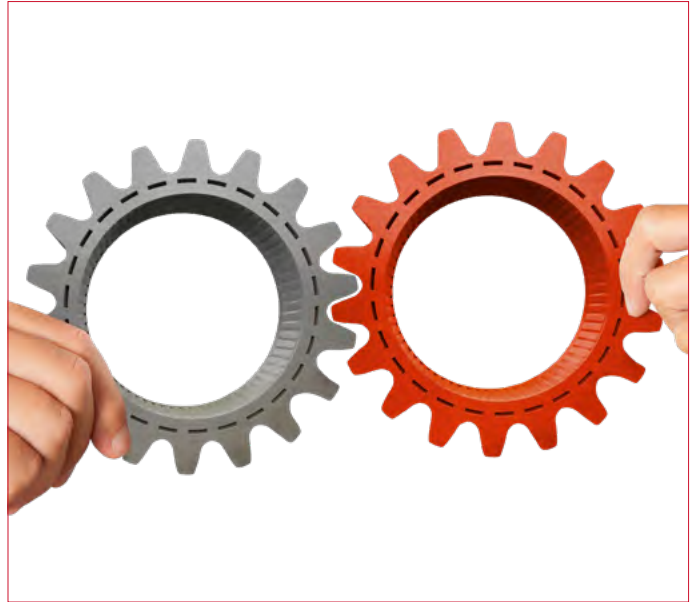

A Bright Future

Technology doesn't stand still, which is why we are constantly innovating to bring you the best products on the market.

Our strong vision and focused innovation strategy, not to mention our passion to revolutionize the industry, ensure that Parker Torchology is a byword for excellence.

We Talk Torches

Ranges

BZL Mig/Mag Torch Series

Suregrip BZL Mig/Mag Torch Range	5
Duragrip BZL Mig/Mag Torch Range	25
Suregrip A-LW Mig/Mag Torch Range	33

Contents

Suregrip BZL Mig/Mag Torch Range Features Focus	6
Suregrip BZL Mig/Mag Torch Range Overview and Ratings	10

Torch Range

Suregrip BZL SGB/SGF 150A	14
Suregrip BZL SGB 240A	15
Suregrip BZL SGB/SGF 250A	16
Suregrip BZL SGB 360A	17
Suregrip BZL SGB 380A	18

Air-Cooled

Suregrip BZL SGB 501W	19
Suregrip BZL SGB 555W	20
Suregrip BZL SGB 605W	21

Liquid-Cooled

Suregrip BZL SB 250A Auto	22
Suregrip BZL SB 360A Auto	23
Suregrip BZL SB 501W Auto	24

Auto

Wear Parts

Nozzles	42
Nozzle Adaptors	42
Contact Tips	45
Tip Adaptors	46
Diffusers	48
Liners	49

Suregrip BZL Mig/Mag Torch Range

Air-Cooled Features Focus

Air-Cooled

The Suregrip BZL series combines ergonomics and premium feature sets for today's welding professionals.

Welding Tools for the Professional



100% Binzel® "Grip Series" Compatibility Guaranteed

Quality Wear Parts


All wear parts are manufactured to the same specification as the original manufacturer ensuring reliability, longevity and superior performance

- Contact tips are manufactured using high quality copper alloys
- Standard and high-performance options are available for tip adaptors, diffusers and swan necks

Ergonomics – For Comfort and Handleability

Every detail has been considered to ensure the welder has the very best handling in all positions

- Screwless designed handle with maximized soft grips for improved balance and positionability
- Torch handles disassemble in 5 seconds for rapid fault analysis
- The addition of a knuckle joint enables small movements of the handle and neck independently of the cable assembly
- Cable supports are designed to combine flexibility with smooth and consistent wire feed

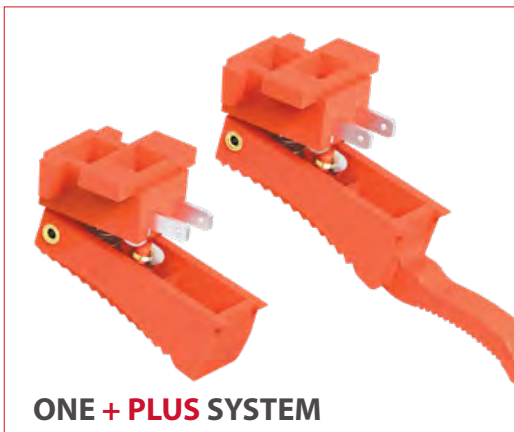

ONE + PLUS SYSTEM

"Plug and Play" Configurability

One + Plus system configured to your exact needs

- "Plug and play" switch interchangeability in seconds! - try it!
- Switches are available with standard and extended lever options
- Micro-switch options for repetitive start/stop applications, digital power source control or harsh and dusty environments

Features Focus

World Class Welding Performance



Swan Necks

Engineered For Extended Service Life

- Chrome plated nozzle seat provides extra durability
- Higher amperage Air-Cooled swan necks utilize fluted copper profiles for superior performance

Superior Flexibility and Durability

Duraflex high performance power cables

- Cable sets offer the ultimate in heat and burn resistance. Fused by an electron beam process that maximizes flexibility and durability
- All Suregrip series Air-Cooled torches are manufactured from Duraflex copper cable systems



Ease of Maintenance

Functionality and ease of repair

- Screwless design solutions. Euro housing sets ensure minimum downtime and productivity – No tools required!
- The Euro body has been redesigned to improve gas seal integrity in Argon applications
- Our spring pins – often copied,, can't be beaten

The Smart Way To Buy Welding and Cutting Tools



Suregrip BZL Mig/Mag Torch Range

Liquid-Cooled Features Focus

Liquid-Cooled

Parker Torchology Liquid-Cooled torches offer maximum reliability and durability. The culmination of 35 years of constant improvement, feature sets and raw material selection are fine tuned for optimum performance.

Welding Tools for the Professional



100% Binzel® "Grip Series" Compatibility Guaranteed

Premium Performance Wear Parts


All front-end wear parts are manufactured to improve current transfer and increase component longevity and ensure superior performance

- Contact tips are manufactured from premium grade copper alloys; we don't sacrifice performance by using low-end or recycled raw materials
- Optional high conductivity tip adaptors and heavy duty diffusers are available

Swan Necks

Engineered For Extended Service Life

- Chrome plated nozzle seat provides extra durability
- Tip adaptor seats produced from a special grade copper alloy for increased service life.

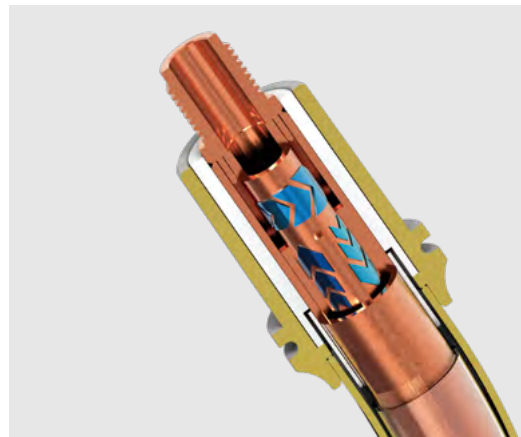


Ergonomics - For Comfort and Handleability

Every detail has been considered to ensure the welder has the very best handling experience

- Screwless designed handle with maximized soft grips for improved balance and positionability
- Torch handles disassemble in 5 seconds for rapid fault analysis
- Handles have been re-engineered to prevent trapped wires
- The addition of a knuckle joint enables small movements of the handle and neck independently of the cable assembly
- Cable supports are designed to combine flexibility with smooth and consistent wire feed

Features Focus

World Class Welding Performance

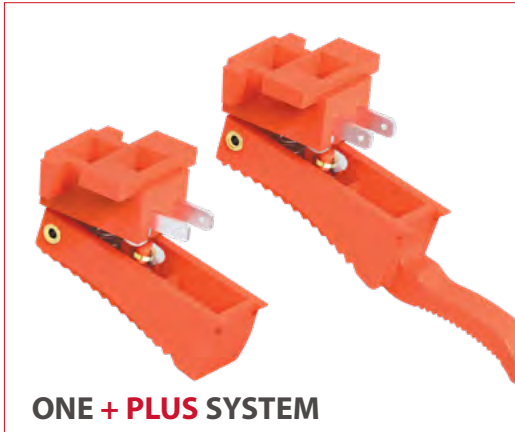

"Plug and Play" Configurability

One + Plus system configured to your exact needs

- "Plug and play" switch interchangeability in seconds! - try it!
- Switches are available with standard and extended lever options
- Micro-switch options for repetitive start/stop applications, digital power source control or harsh and dusty environments

Superior Flexibility and Durability

Hydroflex cable systems

- Cable set materials enhanced to increase service life
- High grade outer liner material prolongs flex life,,, over 1 million flexes in tests
- The copper conductor is coated to prevent premature corrosion from poor quality water and coolant additives



Ease of Maintenance

Functionality and ease of repair

- Screwless design solutions. Euro housing sets ensure minimum downtime and productivity – No tools required!
- The Euro body has been redesigned to improve gas seal integrity in Argon applications
- Our spring pins – often copied,,, can't be beaten



The Smart Way To Buy Welding and Cutting Tools



Model	SGB 150A	SGF 150A	SGB 240A	SGB 250A
Technical Data				
Cooling Method	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating: CO ₂	180A	180A	250A	230A
Rating: Mixed Gas	150A	150A	220A	200A
Duty Cycle	60%	60%	60%	60%
Wire Size	0.6-1.0	0.6-1.0	0.8-1.2	0.8-1.2
Minimum Water Flow	-	-	-	-
Minimum Water Inlet Pressure	-	-	-	-
Minimum Cooling Requirements	-	-	-	-
Maximum Water Inlet Pressure	-	-	-	-
Maximum Water Inlet Temperature	-	-	-	-
Order Codes				
3mt	SGB1500-30ER	SGF1500-30ER	SGB2400-30ER	SGB2500-30ER
4mt	SGB1500-40ER	SGF1500-40ER	SGB2400-40ER	SGB2500-40ER
5mt	SGB1500-50ER	SGF1500-50ER	SGB2400-50ER	SGB2500-50ER

Suregrip BZL Mig/Mag Torch Range

Ratings: 150 Amp to 550 Amp, Mixed Gas



Model	SGF 250A	SGB 360A	SGB 380A
Technical Data			
Cooling Method	Air-Cooled	Air-Cooled	Air-Cooled
Rating: CO ₂	230A	320A	350A
Rating: Mixed Gas	200A	290A	320A
Duty Cycle	60%	60%	60%
Wire Size	0.8-1.2	0.8-1.2	1.0-1.6
Minimum Water Flow	-	-	-
Minimum Water Inlet Pressure	-	-	-
Minimum Cooling Requirements	-	-	-
Maximum Water Inlet Pressure	-	-	-
Maximum Water Inlet Temperature	-	-	-
Order Codes			
3mt	SGF2500-30ER	SGB3600-30ER	SGB3800-30ER
4mt	SGF2500-40ER	SGB3600-40ER	SGB3800-40ER
5mt	SGF2500-50ER	SGB3600-50ER	SGB3800-50ER

Suregrip BZL Mig/Mag Torch Range

Ratings: 150 Amp to 550 Amp, Mixed Gas



Model	SGB 501W	SGB 555W	SGB 605W
Technical Data			
Cooling Method	Liquid-Cooled	Liquid-Cooled	Liquid-Cooled
Rating: CO ₂	500A	550A	600A
Rating: Mixed Gas	450A	500A	550A
Rating: Pulse	-	400A	450A
Duty Cycle	100%	100%	100%
Wire Size	1.0-1.6	1.0-1.6	1.0-1.6
Minimum Water Flow	1.2l/min	1.2l/min	1.2l/min
Minimum Water Inlet Pressure	2.0Bar	2.0Bar	2.0Bar
Minimum Cooling Requirements	1200W	1500W	1700W
Maximum Water Inlet Pressure	5.0Bar	5.0Bar	5.0Bar
Maximum Water Inlet Temperature	50°C	50°C	50°C
Order Codes			
3mt	SGB5000-30ER	SGB5550-30ER	SGB6050-30ER
4mt	SGB5000-40ER	SGB5550-40ER	SGB6050-40ER
5mt	SGB5000-50ER	SGB5550-50ER	SGB6050-50ER

Suregrip BZL Mig/Mag Torch Range

Ratings: 150 Amp to 550 Amp, Mixed Gas




Model	SB250A Auto	SB360A Auto	SB501W Auto
Technical Data			
Cooling Method	Air-Cooled	Air-Cooled	Liquid-Cooled
Rating: CO ₂	230A	320A	500A
Rating: Mixed Gas	200A	290A	450A
Rating: Pulse	-	-	-
Duty Cycle	60%	60%	100%
Wire Size	0.8-1.2	0.8-1.2	1.0-1.6
Minimum Water Flow	-	-	1.2l/min
Minimum Water Inlet Pressure	-	-	2.0Bar
Minimum Cooling Requirements	-	-	1200W
Maximum Water Inlet Pressure	-	-	5.0Bar
Maximum Water Inlet Temperature	-	-	50°C
Order Codes			
3mt	SB2500-20A	SB3600-20A	SB5000-20A
4mt	SB2500-30A	SB3600-30A	SB5000-30A
5mt	SB2500-40A	SB3600-40A	SB5000-40A

SGB/SGF 150A Suregrip BZL Mig/Mag Torch Range

Rating: 180A CO₂, 150A mixed gas, EN60974-7 @ 60% duty cycle. 0.6 to 1.0mm wires

Air-Cooled Mig Welding Torch

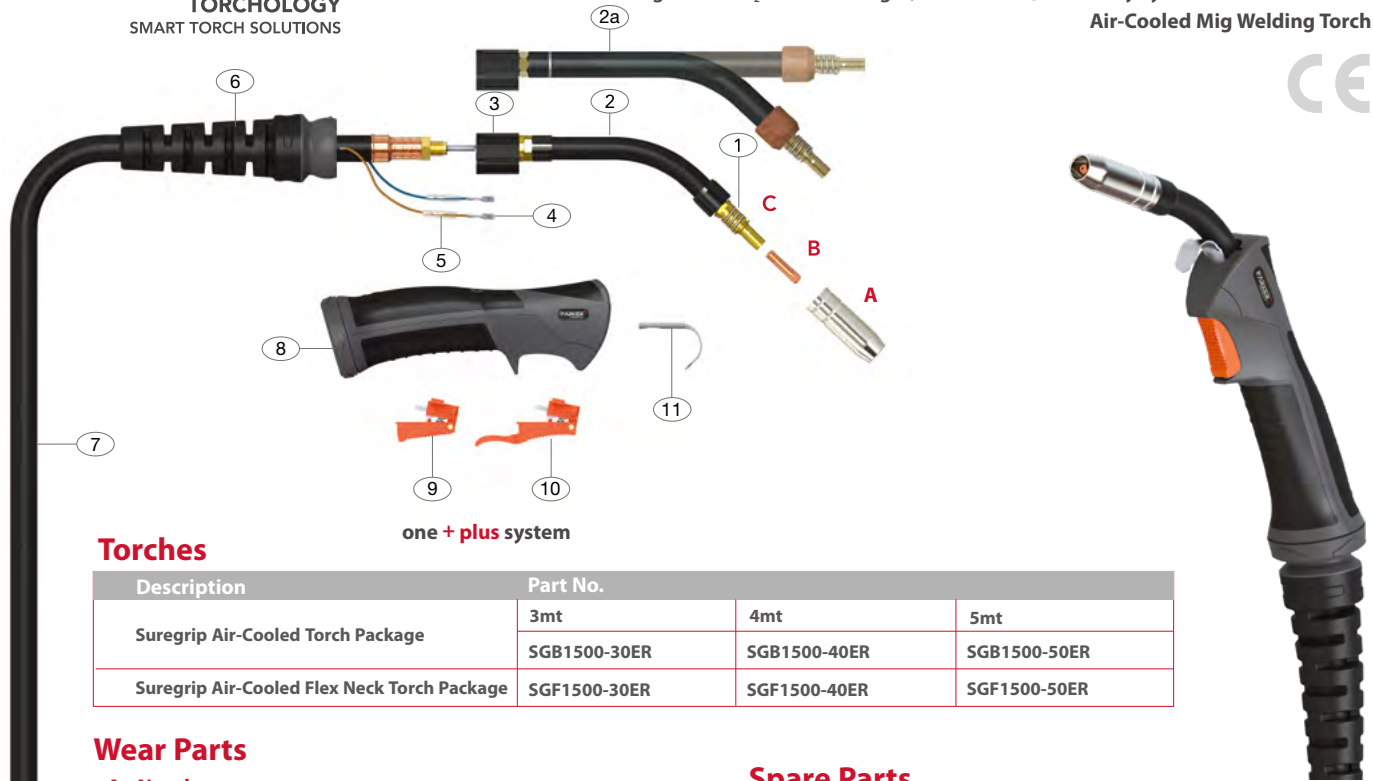

one + plus system

Torches

Description	Part No.		
	3mt	4mt	5mt
Suregrip Air-Cooled Torch Package	SGB1500-30ER	SGB1500-40ER	SGB1500-50ER
Suregrip Air-Cooled Flex Neck Torch Package	SGF1500-30ER	SGF1500-40ER	SGF1500-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PB1529	Cylindrical Nozzle	16.0	0.9mm	Cu
*PB1530	Conical Nozzle	12.0	0.9mm	Cu
PB1531	Tapered Nozzle	10.5	0.9mm	Cu
PB1532	Bottle Nozzle	12.8	0.9mm	Cu
PB1533	Spot Welding Nozzle	16.0	0.9mm	Cu

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB1527-06	Contact Tip	Cu	0.6	0.023"
*PB1527-08	Contact Tip	Cu	0.8	0.030"
PB1527-09	Contact Tip	Cu	0.9	0.035"
PB1527-10	Contact Tip	Cu	1.0	0.040"

C Tip Adaptors

Part No.	Description	Material
*PB1507LH	Tip Adaptor Left Hand	Brass


D Liners

Part No.	Description	Length	Wire Size
			mm
*PB1535-30	Steel Liner x 3mt	3.4mt	0.6-0.9
*PB1535-40	Steel Liner x 4mt	4.4mt	0.6-0.9
*PB1535-50	Steel Liner x 5mt	5.4mt	0.6-0.9

*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54

Spare Parts


Part No.	Description
1	PB1504 Shroud Spring
2	PE1501 Swan Neck Assembly
2a	PF1501 Flex Neck Assembly
3	PG1515 Ergo Handle Location Body
4	PB1521 Cable Terminal
5	PB1521-C Cable Terminal Cover
6	PG8015 Handle Cable Support
7	PS1517-30 Duraflex Cable Assembly x 3mt
	PS1517-40 Duraflex Cable Assembly x 4mt
	PS1517-50 Duraflex Cable Assembly x 5mt
8	SGB2514 Ergo Handle Kit c/w Lock Nut
9	DGB2516 Standard Trigger Assembly
10	DGB2516L Extended Trigger Assembly
11	PB2517 Hanger Hook

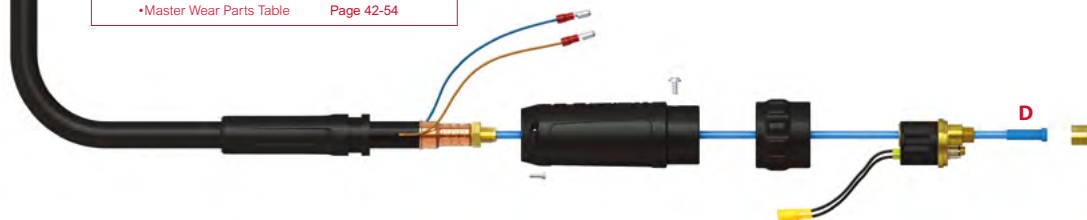

SGB 240A Suregrip BZL Mig/Mag Torch Range

Rating: 250A CO₂, 220A mixed gas, EN60974-7 @ 60% duty cycle. 0.8 to 1.2mm wires

Air-Cooled Mig Welding Torch

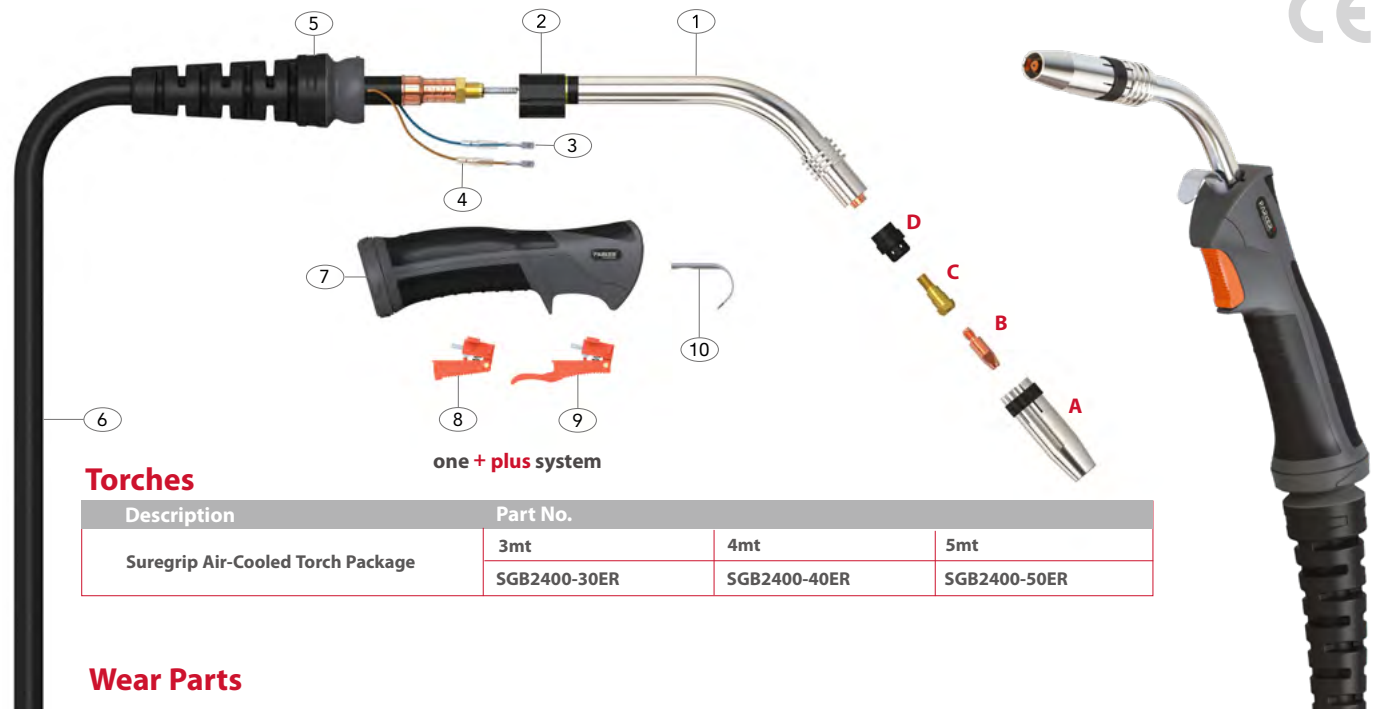

one + plus system

Torches

Description	Part No.		
	3mt	4mt	5mt
Suregrip Air-Cooled Torch Package	SGB2400-30ER	SGB2400-40ER	SGB2400-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PB2415	Cylindrical Nozzle	17.2	1.40mm	Cu
*PB2416	Conical Nozzle	12.6	1.40mm	Cu
PB2417	Tapered Nozzle	10.0	1.40mm	Cu

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB2504-08	Contact Tip	Cu	0.8	0.030"
*PB2504-10	Contact Tip	Cu	1.0	0.040"
PB2504-12	Contact Tip	Cu	1.2	0.045"
PB2504-12A	Contact Tip	Cu	1.2	0.045"
PB2505-08	Contact Tip	CuCrZr	0.8	0.030"
PB2505-10	Contact Tip	CuCrZr	1.0	0.040"
PB2505-12	Contact Tip	CuCrZr	1.2	0.045"
PB2505-12A	Contact Tip	CuCrZr	1.2	0.045"

C Tip Adaptors

Part No.	Description	Material
*PB2412	Tip Adaptor	Brass

D Diffusers

Part No.	Description	Colour	Material
*PB2405B	Diffuser	Black	DMC3
PB2405C	Diffuser	White	Ceramic
PB2405W	Diffuser	White	DMC3
PB2405S	Diffuser	Red	Silicon

E Liners

Part No.	Description	Length	Wire Size
			mm
*PB2524-30	Steel Liner x 3mt	3.4mt	1.0-1.2
*PB2524-40	Steel Liner x 4mt	4.4mt	1.0-1.2
*PB2524-50	Steel Liner x 5mt	5.4mt	1.0-1.2

Spare Parts

Part No.	Description
1	PG2401 Swan Neck Assembly
2	PG1515 Ergo Handle Location Body
3	PB1521 Cable Terminal
4	PB1521-C Cable Terminal Cover
5	PG8015 Handle Cable Support
6	PS2403-30 Duraflex Cable Assembly x 3mt
	PS2403-40 Duraflex Cable Assembly x 4mt
	PS2403-50 Duraflex Cable Assembly x 5mt
7	SGB2514 Ergo Handle Kit c/w Lock Nut
8	DGB2516 Standard Trigger Assembly
9	DGB2516L Extended Trigger Assembly
10	PB2517 Hanger Hook


*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54



SGB/SGF 250A Suregrip BZL Mig/Mag Torch Range

Rating: 230A CO₂, 200A mixed gas, EN60974-7 @ 60% duty cycle. 0.8 to 1.2mm wires

Air-Cooled Mig Welding Torch

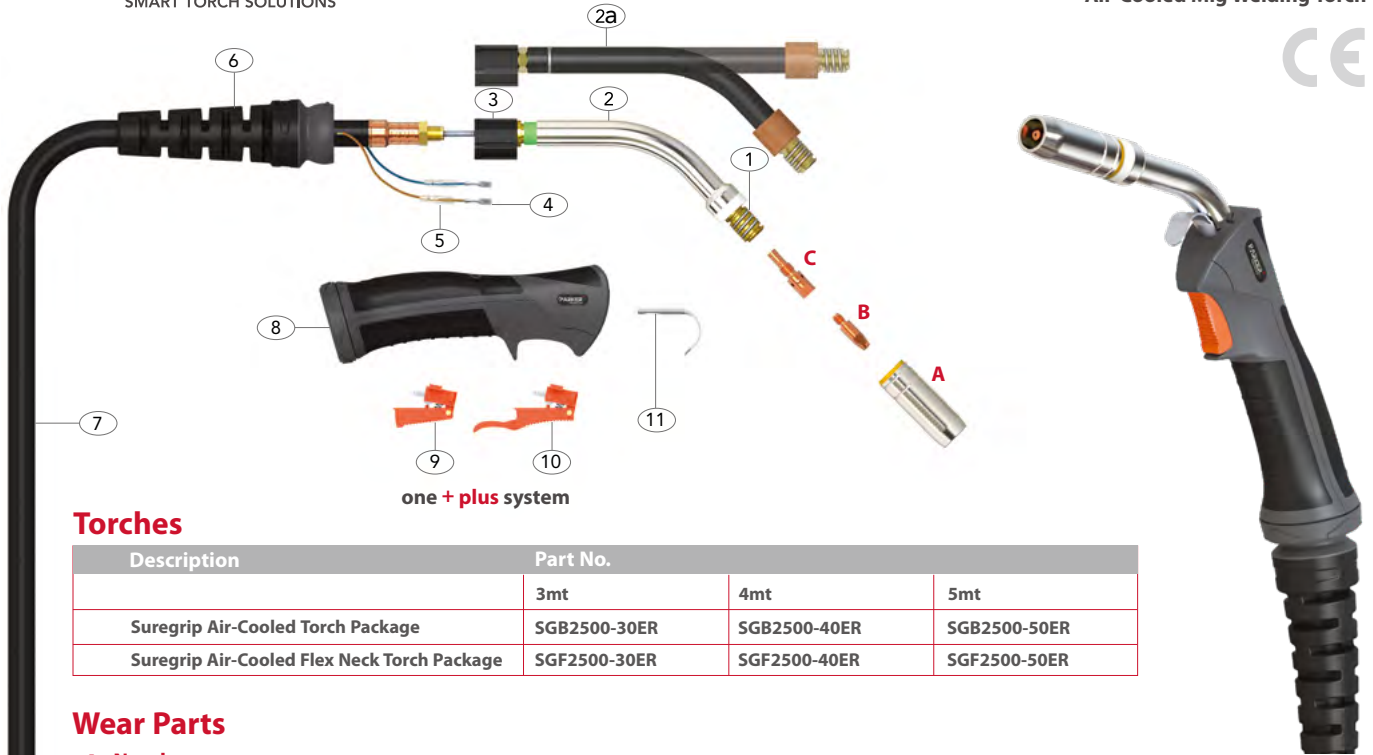

Torches

Description	Part No.		
	3mt	4mt	5mt
Suregrip Air-Cooled Torch Package	SGB2500-30ER	SGB2500-40ER	SGB2500-50ER
Suregrip Air-Cooled Flex Neck Torch Package	SGF2500-30ER	SGF2500-40ER	SGF2500-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PB2507	Cylindrical Nozzle	18.0	1.5mm	Cu
*PB2508	Conical Nozzle	15.0	1.5mm	Cu
PB2509	Tapered Nozzle	12.0	1.5mm	Cu
PB2510	Bottle Nozzle	14.5	1.5mm	Cu
PB2511	Spot Welding Nozzle	18.0	1.5mm	Cu

B Contact Tips M8

Part No.	Description	Material	Wire Size	
			mm	Inch
PB2504-08	Contact Tip	Cu	0.8	0.030"
*PB2504-10	Contact Tip	Cu	1.0	0.040"
PB2504-12	Contact Tip	Cu	1.2	0.045"
PB2504-10A	Contact Tip	Cu	1.0	0.040"
PB2504-12A	Contact Tip	Cu	1.2	0.045"
PB2505-08	Contact Tip	CuCrZr	0.8	0.030"
PB2505-10	Contact Tip	CuCrZr	1.0	0.040"
PB2505-12	Contact Tip	CuCrZr	1.2	0.045"
PB2505-10A	Contact Tip	CuCrZr	1.0	0.040"
PB2505-12A	Contact Tip	CuCrZr	1.2	0.045"

C Tip Adaptors

Part No.	Description	Material
*PB2506	Tip Adaptor	Brass
PB2536	Tip Adaptor M8	Brass

D Liners

Part No.	Description	Length	Wire Size
*PB2524-30	Steel Liner x 3mt	3.4mt	1.0-1.2
*PB2524-40	Steel Liner x 4mt	4.4mt	1.0-1.2
*PB2524-50	Steel Liner x 5mt	5.4mt	1.0-1.2


Spare Parts

Part No.	Description
1	PB2502 Shroud Spring
2	PG2501 Swan Neck Assembly
2a	PF2501 Flex Neck Assembly
3	PG1515 Ergo Handle Location Body
4	PB1521 Cable Terminal
5	PB1521-C Cable Terminal Cover
6	PG8015 Handle Cable Support
7	PS2503-30 Duraflex Cable Assembly x 3mt
	PS2503-40 Duraflex Cable Assembly x 4mt
	PS2503-50 Duraflex Cable Assembly x 5mt
8	SGB2514 Ergo Handle Kit c/w Lock Nut
9	DGB2516 Standard Trigger Assembly
10	DGB2516L Extended Trigger Assembly
11	PB2517 Hanger Hook

*Denotes torch package standard wear part set-up

For more information please refer to the following sections:


*Master Wear Parts Table Page 42-54

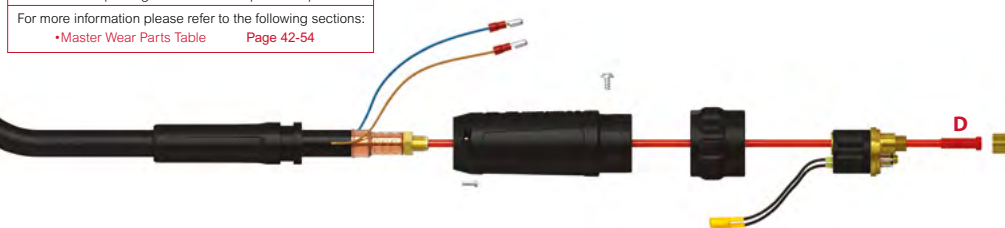

SGB 360A Suregrip BZL Mig/Mag Torch Range

Rating: 320A CO₂, 290A mixed gas, EN60974-7 @ 60% duty cycle. 0.8 to 1.2mm wires

Air-Cooled Mig Welding Torch

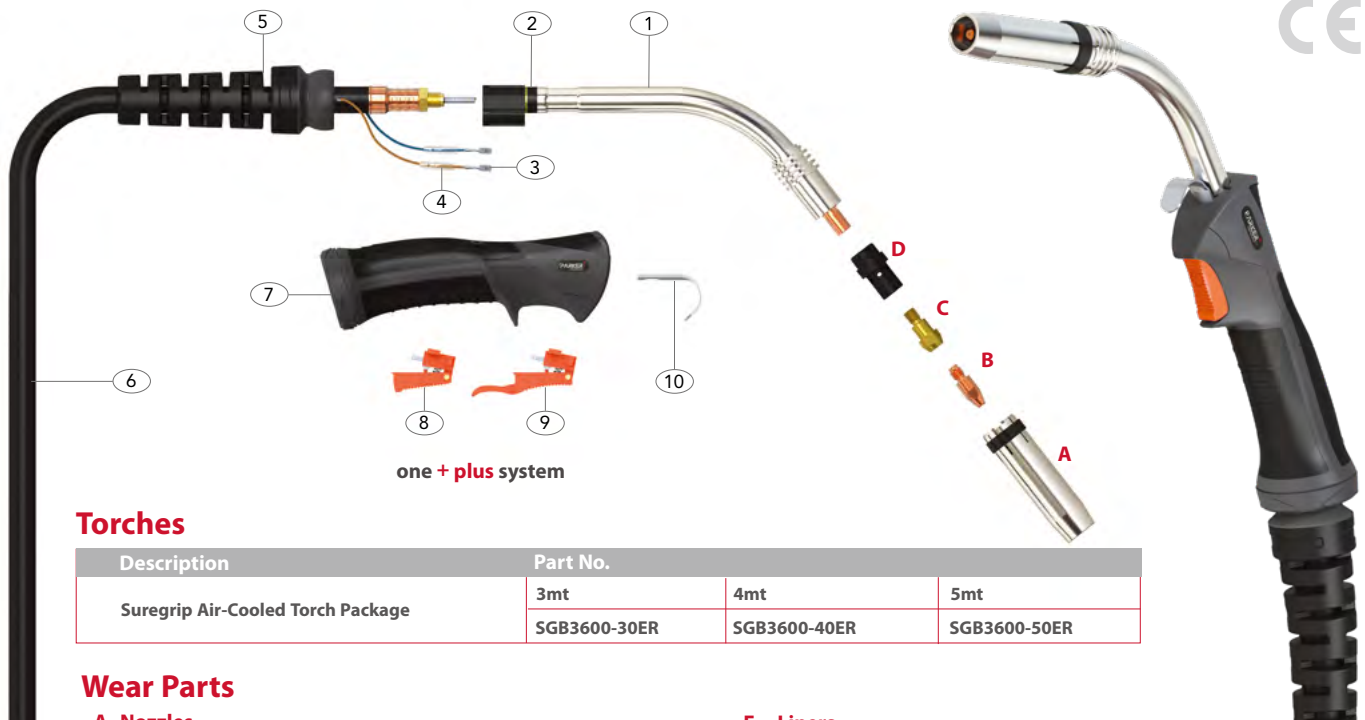

one + plus system

Torches

Description	Part No.		
	3mt	4mt	5mt
Suregrip Air-Cooled Torch Package	SGB3600-30ER	SGB3600-40ER	SGB3600-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PB3615	Cylindrical Nozzle	19.0	2.25mm	Cu
*PB3616	Conical Nozzle	16.1	2.25mm	Cu
PB3617	Tapered Nozzle	12.0	2.25mm	Cu

E Liners

Part No.	Description	Length	Wire Size
			mm
*PB2524-30	Steel Liner x 3mt	3.4mt	1.0-1.2
*PB2524-40	Steel Liner x 4mt	4.4mt	1.0-1.2
*PB2524-50	Steel Liner x 5mt	5.4mt	1.0-1.2

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB2504-08	Contact Tip	Cu	0.8	0.030"
PB2504-10	Contact Tip	Cu	1.0	0.040"
PB2504-12	Contact Tip	Cu	1.2	0.045"
PB2504-10A	Contact Tip	Cu	1.0	0.040"
PB4014-08	Contact Tip	Cu	0.8	0.030"
PB4014-10	Contact Tip	Cu	1.0	0.040"
*PB4014-12	Contact Tip	Cu	1.2	0.045"

Spare Parts

Part No.	Description
1	PG3603 Swan Neck Assembly
2	PG1515 Ergo Handle Location Body
3	PB1521 Cable Terminal
4	PB1521-C Cable Terminal Cover
5	PG8016 Handle Cable Support
6	PS3609-30 Duraflex Cable Assembly x 3mt
	PS3609-40 Duraflex Cable Assembly x 4mt
	PS3609-50 Duraflex Cable Assembly x 5mt
7	SGB2514 Ergo Handle Kit c/w Lock Nut
8	DGB2516 Standard Trigger Assembly
9	DGB2516L Extended Trigger Assembly
10	PB2517 Hanger Hook

C Tip Adaptors

Part No.	Description	Material
PB3612	Tip Adaptor	Brass
PB3613	Tip Adaptor	Brass
*PB3614	Tip Adaptor	Brass

D Diffusers

Part No.	Description	Colour	Material
*PB3605B	Diffuser	Black	DMC3
PB3605C	Diffuser	White	Ceramic
PB3605W	Diffuser	White	DMC3


*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54



SGB 380A Suregrip BZL Mig/Mag Torch Range

Rating: 350A CO₂, 320A mixed gas, EN60974-7 @ 60% duty cycle. 1.0 to 1.6mm wires

Air-Cooled Mig Welding Torch

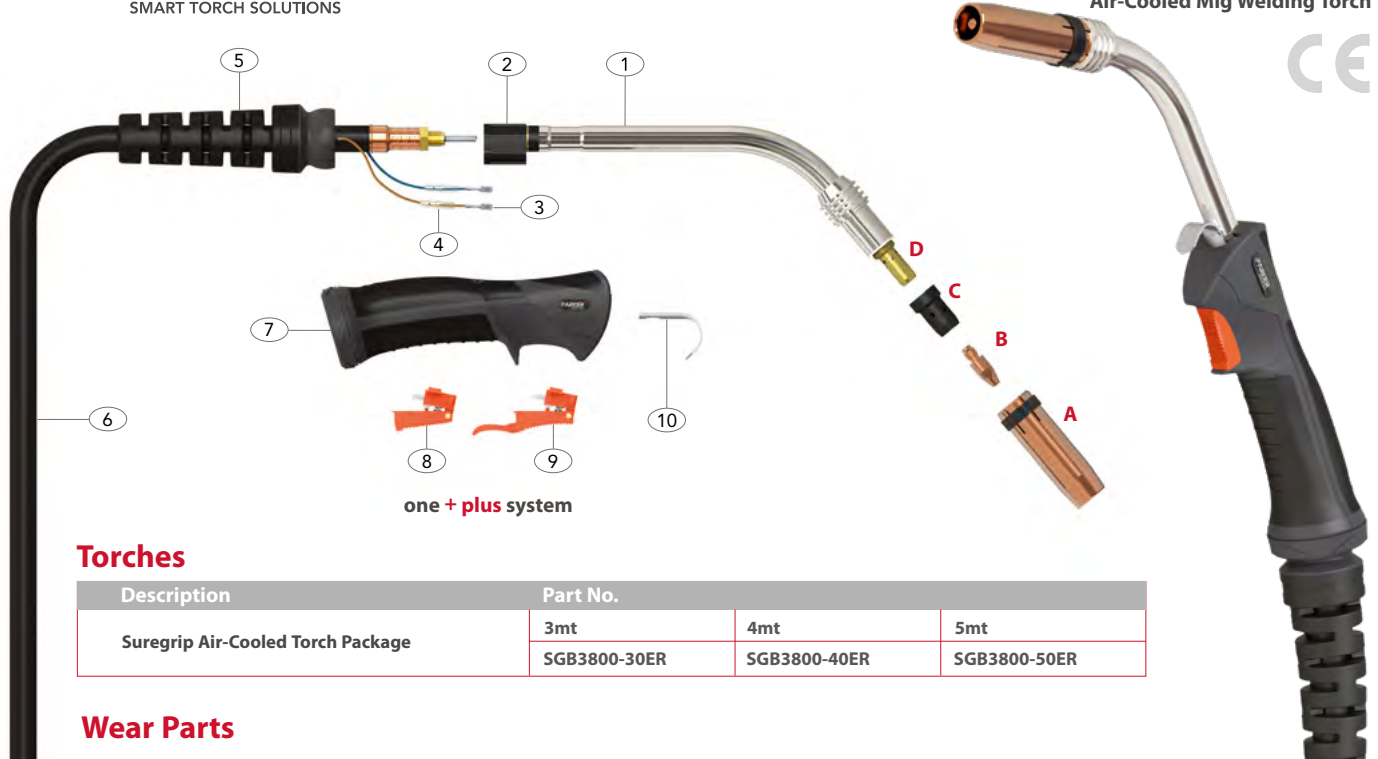

one + plus system

Torches

Description	Part No.		
	3mt	4mt	5mt
Suregrip Air-Cooled Torch Package	SGB3800-30ER	SGB3800-40ER	SGB3800-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PB5027	Cylindrical Nozzle	19.0	2.25mm	Cu
*PB5028	Conical Nozzle	16.0	2.25mm	Cu
PB5028HD	Conical Nozzle	16.0	3.20mm	Cu
PB5029	Tapered Nozzle	14.0	2.25mm	Cu

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB4014-10	Contact Tip	Cu	1.0	0.040"
*PB4014-12	Contact Tip	Cu	1.2	0.045"
PB4014-16	Contact Tip	Cu	1.6	0.063"
PB4015-12	Contact Tip	CuCrZr	1.2	0.045"
PB4015-16	Contact Tip	CuCrZr	1.6	0.063"

C Diffusers

Part No.	Description	Colour	Material
*PB5005B	Diffuser	Black	DM3
PB5005W	Diffuser	White	DM3

D Tip Adaptors

Part No.	Description	Material
*PB3812	Tip Adaptor	Brass

E Liners

Part No.	Description	Length	Wire Size
			mm
*PB2524-30	Steel Liner x 3mt	3.4mt	1.0-1.2
*PB2524-40	Steel Liner x 4mt	4.4mt	1.0-1.2
*PB2524-50	Steel Liner x 5mt	5.4mt	1.0-1.2

Spare Parts

Part No.	Description
1	PG3801 Swan Neck Assembly
2	PG1515 Ergo Handle Location Body
3	PB1521 Cable Terminal
4	PB1521-C Cable Terminal Cover
5	PG8016 Handle Cable Support
6	PS3809-30 Duraflex Cable Assembly x 3mt
	PS3809-40 Duraflex Cable Assembly x 4mt
	PS3809-50 Duraflex Cable Assembly x 5mt
7	SGB2514 Ergo Handle Kit c/w Lock Nut
8	DGB2516 Standard Trigger Assembly
9	DGB2516L Extended Trigger Assembly
10	PB2517 Hanger Hook

*Denotes torch package standard wear part set-up

For more information please refer to the following sections:


•Master Wear Parts Table Page 42-54



SGB 501W Suregrip BZL Mig/Mag Torch Range

Rating: 500A CO₂, 450A mixed gas, EN60974-7 @ 100% duty cycle. 1.0 to 1.6mm wires

Liquid-Cooled Mig Welding Torch

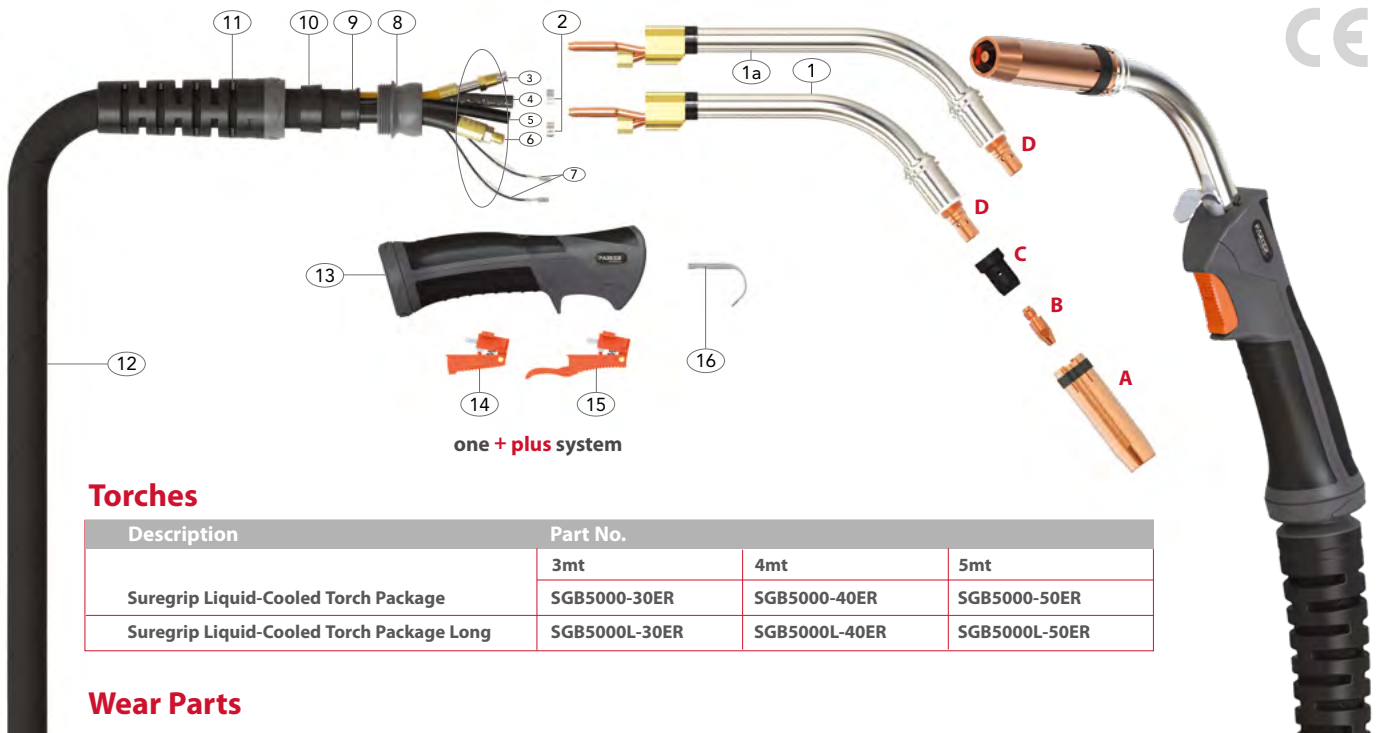

Torches

Description	Part No.		
	3mt	4mt	5mt
Suregrip Liquid-Cooled Torch Package	SGB5000-30ER	SGB5000-40ER	SGB5000-50ER
Suregrip Liquid-Cooled Torch Package Long	SGB5000L-30ER	SGB5000L-40ER	SGB5000L-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PB5027	Cylindrical Nozzle	19.0	2.50mm	Cu
*PB5028	Conical Nozzle	16.0	2.50mm	Cu
PB5028HD	Conical Nozzle	16.0	3.20mm	Cu
PB5029	Tapered Nozzle	14.0	2.50mm	Cu

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB4014-10	Contact Tip	Cu	1.0	0.040"
PB4014-12	Contact Tip	Cu	1.2	0.045"
PB4014-16	Contact Tip	Cu	1.6	0.063"
*PB4015-12	Contact Tip	CuCrZr	1.2	0.045"
PB4015-16	Contact Tip	CuCrZr	1.6	0.063"

C Diffusers

Part No.	Description	Colour	Material
PB5005B	Diffuser	Black	DMC3
PB5005C	Diffuser	White	Ceramic
PB5005W	Diffuser	White	DMC3
*PB5005H	High Performance	Black	HPP

D Tip Adaptors

Part No.	Description	Material
PB5001	Tip Adaptor	Brass
*PB5001C	Tip Adaptor	CuCrZr

E Liners

Part No.	Description	Length	Wire Size
*PB5033-30	Steel Liner x 3mt	3.5mt	1.0-1.2
*PB5033-40	Steel Liner x 4mt	4.5mt	1.0-1.2
*PB5033-50	Steel Liner x 5mt	5.5mt	1.0-1.2

Spare Parts

Part No.	Description
1	PG5002 Swan Neck Assembly
1a	PG5002L Swan Neck Assembly Long
2	PB5041 Hose Clamp 8.7mm
8	PPG3208-1 Ball Joint
9	PT8010 Canvas Cover Retainer Small
10	PG3235 Sheath Block
11	PGN3208-P Cable Support
12	PS5006-30 Cable Assembly x 3mt
	PS5006-40 Cable Assembly x 4mt
	PS5006-50 Cable Assembly x 5mt
13	SGB2514 Ergo Handle Kit c/w Lock Nut
14	DGB2516 Standard Trigger Assembly
15	DGB2516L Extended Trigger Assembly
16	PB2517 Hanger Hook


Cable Parts

Description	Part No.		
	3mt	4mt	5mt
3 Outer Liner Assembly	PS5008-30	PS5008-40	PS5008-50
4 Gas Hose Assembly	PS5013-30	PS5013-40	PS5013-50
5 Water Inlet Hose Assembly	PS5012-30	PS5012-40	PS5012-50
6 Power Cable Assembly	PS5015-30	PS5015-40	PS5015-50
7 Switch Lead Assembly	PS5010-30	PS5010-40	PS5010-50
17 Water Outlet Hose	PS5017	PS5017	PS5017

*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54

SGB 555W Suregrip BZL Mig/Mag Torch Range

Rating: 550A CO₂, 500A mixed gas, 400A pulse, EN60974-7 @ 100% duty cycle. 1.0 to 1.6mm wires
Liquid-Cooled Mig Welding Torch

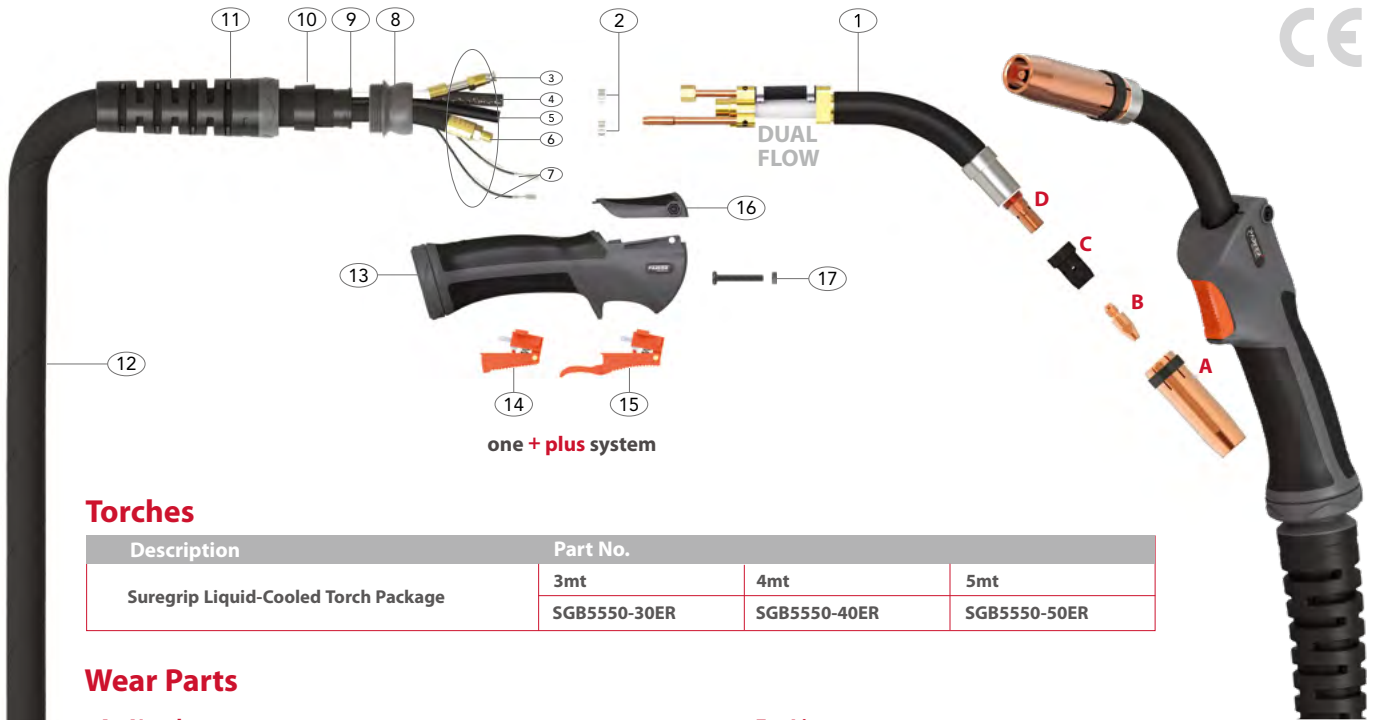

one + plus system

Torches

Description	Part No.		
	3mt	4mt	5mt
Suregrip Liquid-Cooled Torch Package	SGB5550-30ER	SGB5550-40ER	SGB5550-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PB5027	Cylindrical Nozzle	19.0	2.50mm	Cu
*PB5028	Conical Nozzle	16.0	2.50mm	Cu
PB5028HD	Conical Nozzle	16.0	3.20mm	Cu
PB5029	Tapered Nozzle	14.0	2.50mm	Cu

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB4014-10	Contact Tip	Cu	1.0	0.040"
PB4014-12	Contact Tip	Cu	1.2	0.045"
PB4014-16	Contact Tip	Cu	1.6	0.063"
PB4015-10	Contact Tip	CuCrZr	1.0	0.040"
*PB4015-12	Contact Tip	CuCrZr	1.2	0.045"
PB4015-16	Contact Tip	CuCrZr	1.6	0.063"

C Diffusers

Part No.	Description	Colour	Material
PB5005B	Diffuser	Black	DMC3
PB5005C	Diffuser	White	Ceramic
PB5005W	Diffuser	White	DMC3
*PB5005H	High Performance	Black	HPP

D Tip Adaptors

Part No.	Description	Material
*PB5501	Tip Adaptor	CuCrZr

E Liners

Part No.	Description	Length	Wire Size
			mm
*PB5033-30	Steel Liner x 3mt	3.5mt	1.0-1.2
*PB5033-40	Steel Liner x 4mt	4.5mt	1.0-1.2
*PB5033-50	Steel Liner x 5mt	5.5mt	1.0-1.2


Spare Parts

Part No.	Description
1	PB5502 Swan Neck Assembly
2	PB5041 Hose Clamp 8.7mm
8	PPG3208-1 Ball Joint
9	PT8010 Canvas Cover Retainer Small
10	PG3235 Sheath Block
11	PGN3208-P Cable Support
12	PS5506-30 Cable Assembly x 3mt
	PS5506-40 Cable Assembly x 4mt
	PS5506-50 Cable Assembly x 5mt
13	SGM2515/KJ High Capacity Handle Assembly
14	DGBH2516 Standard Trigger Assembly
15	DGBH2516L Extended Trigger Assembly
16	PDM0 Top Housing With Grip
17	PDMNS Module Retaining Screw

Cable Parts


Description	Part No.		
	3mt	4mt	5mt
3 Outer Liner Assembly	PS5508-30	PS5508-40	PS5508-50
4 Gas Hose Assembly	PS5013-30	PS5013-40	PS5013-50
5 Water Inlet Hose Assembly	PS5012-30	PS5012-40	PS5012-50
6 Power Cable Assembly	PS5515-30	PS5515-40	PS5515-50
7 Switch Lead Assembly	PS5010-30	PS5010-40	PS5010-50
18 Water Outlet Hose	PS5017	PS5017	PS5017

*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
*Master Wear Parts Table Page 42-54

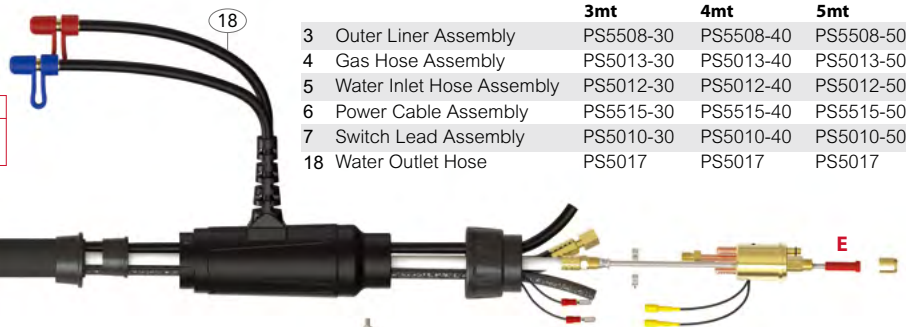

SGB 605W Suregrip BZL Mig/Mag Torch Range

Rating: 600A CO₂, 550A mixed gas, 450A pulse EN60974-7 @ 100% duty cycle. 1.0 to 1.6mm wires
Liquid-Cooled Mig Welding Torch

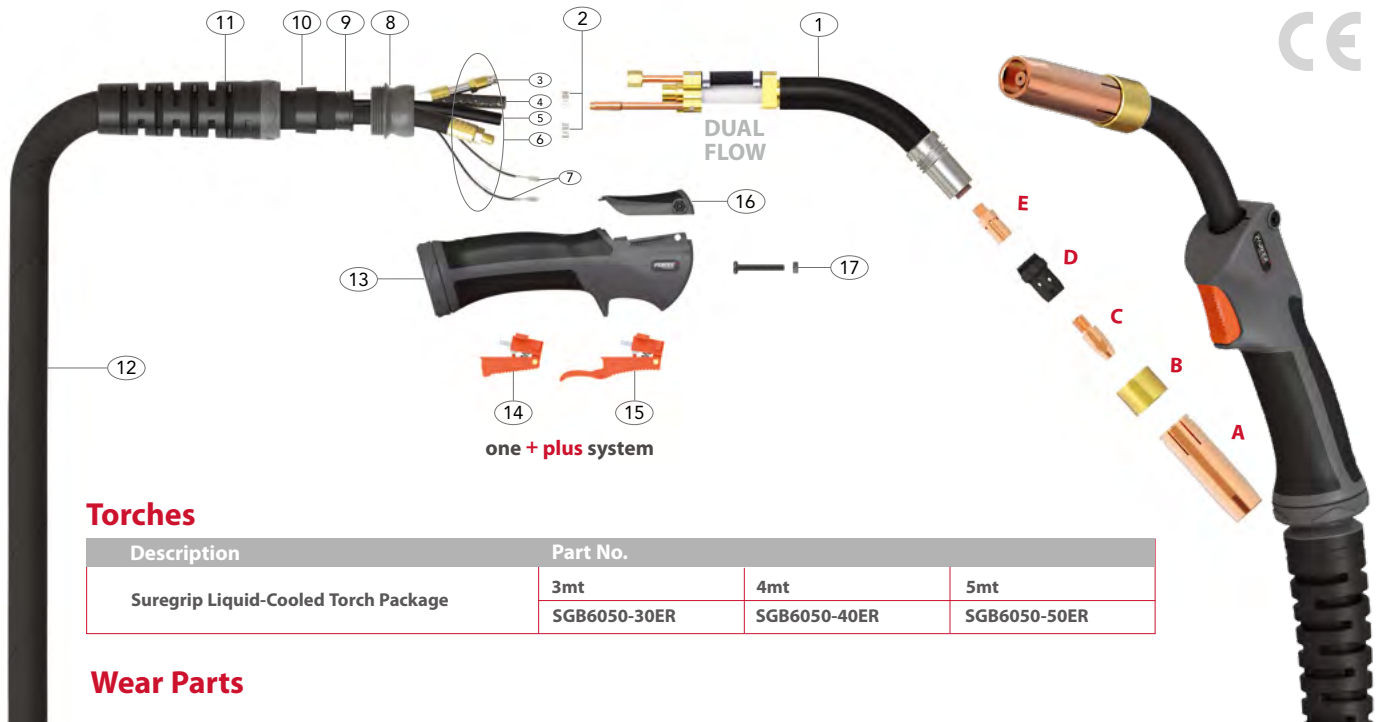

Torches

Description	Part No.		
Suregrip Liquid-Cooled Torch Package	3mt	4mt	5mt
	SGB6050-30ER	SGB6050-40ER	SGB6050-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
*PB6528	Conical Nozzle	17.0	2.60mm	Cu

B Nozzle Adaptors

Part No.	Description	Material
*PB6515	Nozzle Adaptor	Brass

C Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB6015-10	Contact Tip	CuCrZr	1.0	0.040"
*PB6015-12	Contact Tip	CuCrZr	1.2	0.045"
PB6015-14	Contact Tip	CuCrZr	1.4	0.055"
PB6015-16	Contact Tip	CuCrZr	1.6	0.063"

D Diffusers

Part No.	Description	Colour	Material
*PB6505H	High Performance	Black	HPP

E Tip Adaptors

Part No.	Description	Material
*PB6501	Tip Adaptor 29.0mm M10	CuCrZr

F Liners

Part No.	Description	Length	Wire Size
*PB5033-30	Steel Liner x 3mt	3.5mt	1.0-1.2
*PB5033-40	Steel Liner x 4mt	4.5mt	1.0-1.2
*PB5033-50	Steel Liner x 5mt	5.5mt	1.0-1.2


Spare Parts

Part No.	Description	
1	PB6502	Swan Neck Assembly
2	PB5041	Hose Clamp 8.7mm
8	PPG3208-1	Ball Joint
9	PT8010	Canvas Cover Retainer Small
10	PG3235	Sheath Block
11	PGN3208-P	Cable Support
12	PS5506-30	Cable Assembly x 3mt
	PS5506-40	Cable Assembly x 4mt
	PS5506-50	Cable Assembly x 5mt
13	SGM2515/KJ	High Capacity Handle Assembly
14	DGBH2516	Standard Trigger Assembly
15	DGBH2516L	Extended Trigger Assembly
16	PDM0	Top Housing With Grip
17	PDMNS	Module Retaining Screw

Cable Parts

Description	Part No.		
	3mt	4mt	5mt
3 Outer Liner Assembly	PS5508-30	PS5508-40	PS5508-50
4 Gas Hose Assembly	PS5013-30	PS5013-40	PS5013-50
5 Water Inlet Hose Assembly	PS5012-30	PS5012-40	PS5012-50
6 Power Cable Assembly	PS5515-30	PS5515-40	PS5515-50
7 Switch Lead Assembly	PS5010-30	PS5010-40	PS5010-50
18 Water Outlet Hose	PS5017	PS5017	PS5017

*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54

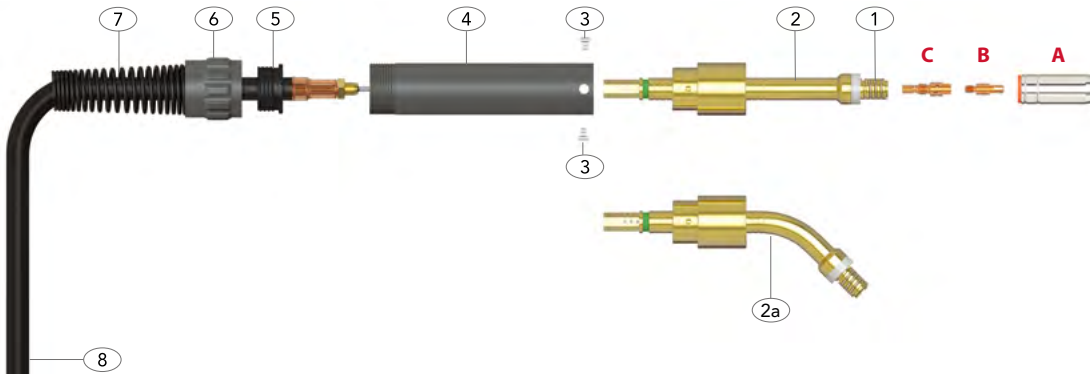

Torches

Description	Part No.		
	2mt	3mt	4mt
Air-Cooled Auto Torch Package	SB2500-20A	SB2500-30A	SB2500-40A
	SB2545-20A	SB2545-30A	SB2545-40A

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PB2507	Cylindrical Nozzle	18.0	1.5mm	Cu
*PB2508	Conical Nozzle	15.0	1.5mm	Cu
PB2509	Tapered Nozzle	12.0	1.5mm	Cu
PB2510	Bottle Nozzle	14.5	1.5mm	Cu
PB2511	Spot Welding Nozzle	18.0	1.5mm	Cu

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB2504-08	Contact Tip	Cu	0.8	0.030"
*PB2504-10	Contact Tip	Cu	1.0	0.040"
PB2504-12	Contact Tip	Cu	1.2	0.045"
PB2504-10A	Contact Tip	Cu	1.0	0.040"
PB2504-12A	Contact Tip	Cu	1.2	0.045"

C Tip Adaptors

Part No.	Description	Material
*PB2506	Tip Adaptor	Brass
PB2536	Tip Adaptor M8	Brass

D Liners

Part No.	Description	Length	Wire Size
*PB2524-20	Steel Liner x 2mt	2.4mt	1.0-1.2
*PB2524-30	Steel Liner x 3mt	3.4mt	1.0-1.2
*PB2524-40	Steel Liner x 4mt	4.4mt	1.0-1.2

Spare Parts

Part No.	Description
1	PB2502 Shroud Spring
2	PG2520 Swan Neck Assembly
2a	PG2545A Swan Neck Assembly 45°
3	PB3629 Handle Screw
4	PB3630 Automatic Handle
5	PB8110A Auto Handle Insert
6	PB8030A Auto Handle Lock Nut
7	PMIG8017A Auto Handle Spring
8	PS2503-20A Duraflex Cable Assembly x 2mt
	PS2503-30A Duraflex Cable Assembly x 3mt
	PS2503-40A Duraflex Cable Assembly x 4mt

*Denotes torch package standard wear part set-up


For more information please refer to the following sections:

*Master Wear Parts Table Page 42-54



SB 360A Auto BZL Mig/Mag Torch Range

Rating: 320A CO₂, 290A mixed gas, EN60974-7 @ 60% duty cycle. 0.8 to 1.2mm wires
Air-Cooled Mig Welding Torch

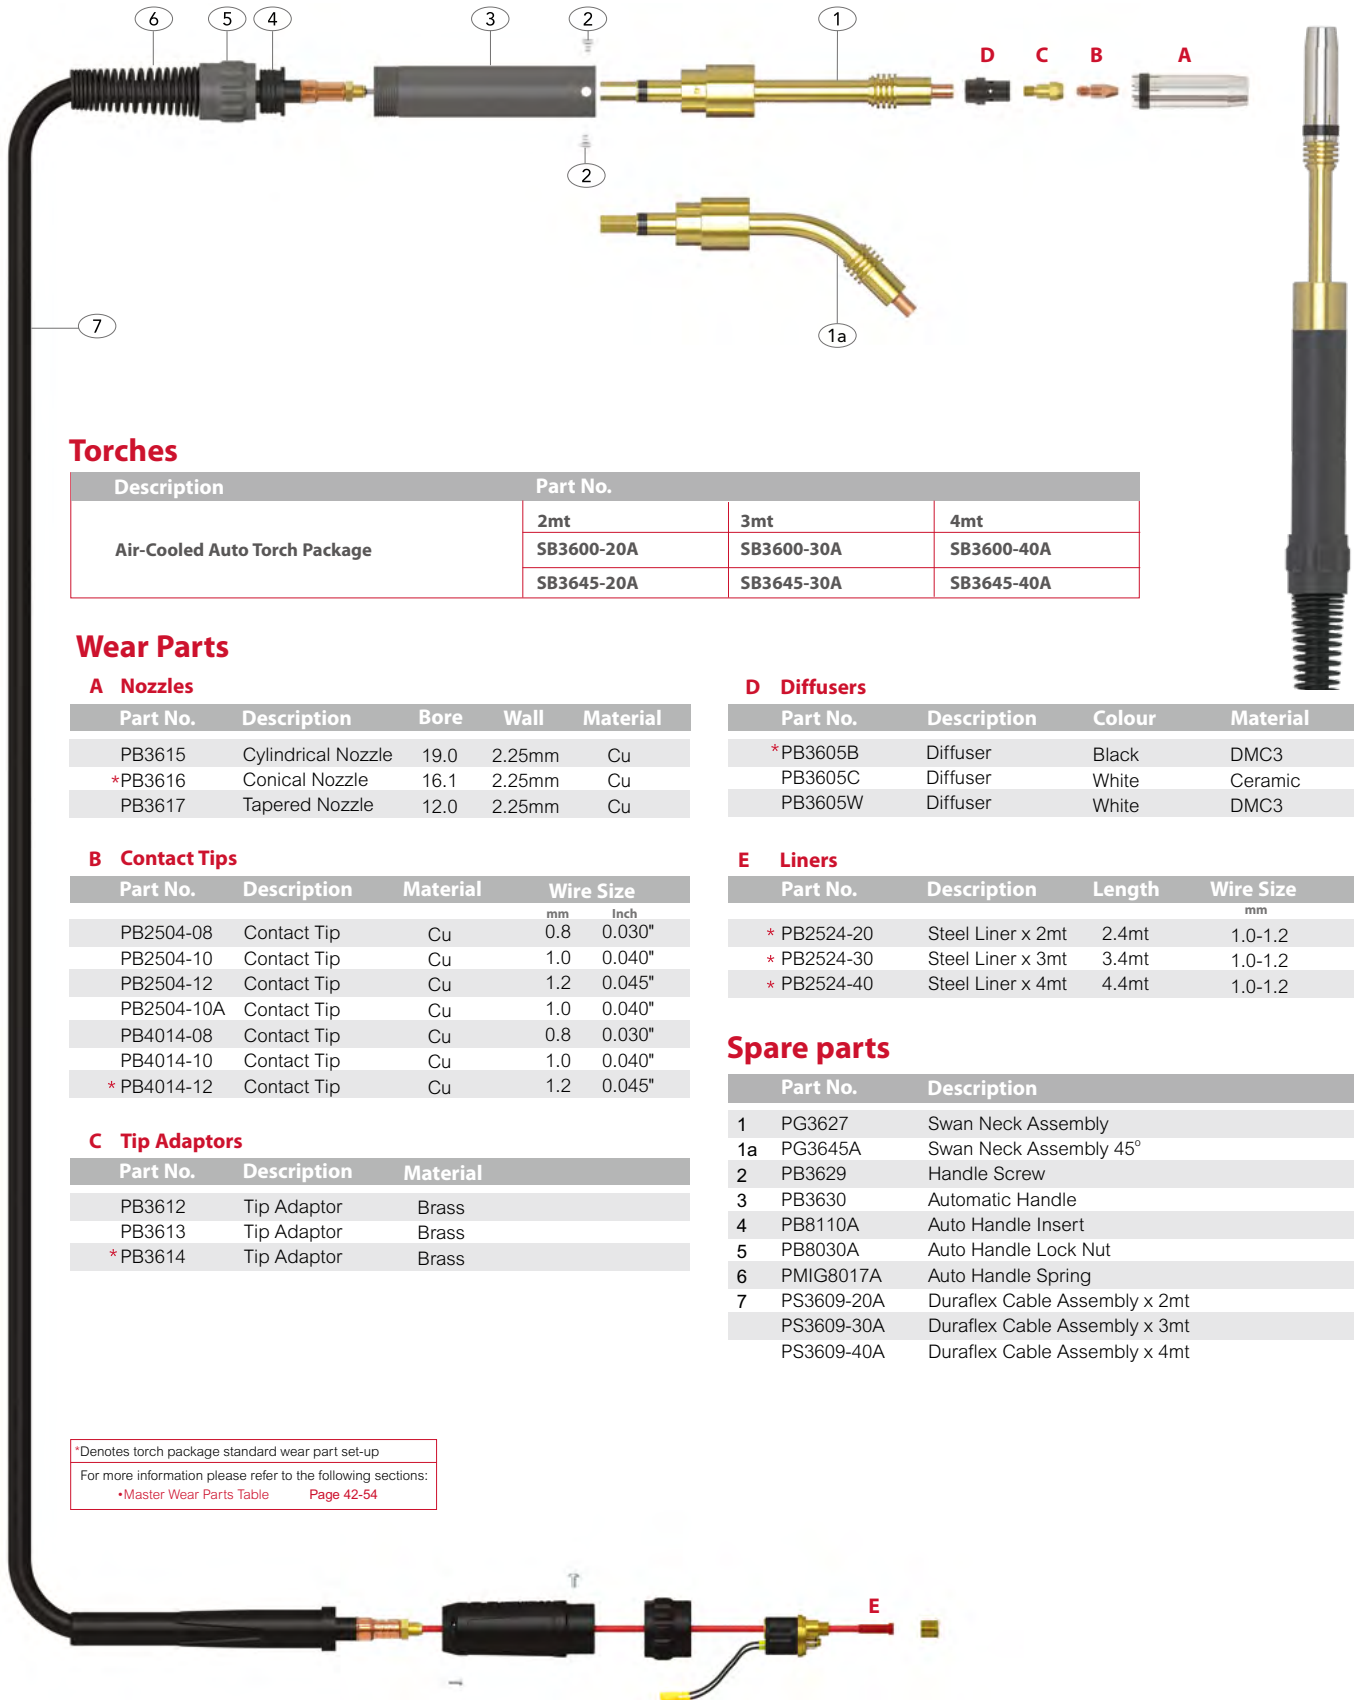

Torches

Description	Part No.		
	2mt	3mt	4mt
Air-Cooled Auto Torch Package	SB3600-20A	SB3600-30A	SB3600-40A
	SB3645-20A	SB3645-30A	SB3645-40A

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PB3615	Cylindrical Nozzle	19.0	2.25mm	Cu
*PB3616	Conical Nozzle	16.1	2.25mm	Cu
PB3617	Tapered Nozzle	12.0	2.25mm	Cu

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB2504-08	Contact Tip	Cu	0.8	0.030"
PB2504-10	Contact Tip	Cu	1.0	0.040"
PB2504-12	Contact Tip	Cu	1.2	0.045"
PB2504-10A	Contact Tip	Cu	1.0	0.040"
PB4014-08	Contact Tip	Cu	0.8	0.030"
PB4014-10	Contact Tip	Cu	1.0	0.040"
*PB4014-12	Contact Tip	Cu	1.2	0.045"

C Tip Adaptors

Part No.	Description	Material
PB3612	Tip Adaptor	Brass
PB3613	Tip Adaptor	Brass
*PB3614	Tip Adaptor	Brass

D Diffusers

Part No.	Description	Colour	Material
*PB3605B	Diffuser	Black	DMC3
PB3605C	Diffuser	White	Ceramic
PB3605W	Diffuser	White	DMC3

E Liners

Part No.	Description	Length	Wire Size
			mm
*PB2524-20	Steel Liner x 2mt	2.4mt	1.0-1.2
*PB2524-30	Steel Liner x 3mt	3.4mt	1.0-1.2
*PB2524-40	Steel Liner x 4mt	4.4mt	1.0-1.2


Spare parts

Part No.	Description
1	PG3627 Swan Neck Assembly
1a	PG3645A Swan Neck Assembly 45°
2	PB3629 Handle Screw
3	PB3630 Automatic Handle
4	PB8110A Auto Handle Insert
5	PB8030A Auto Handle Lock Nut
6	PMIG8017A Auto Handle Spring
7	PS3609-20A Duraflex Cable Assembly x 2mt
	PS3609-30A Duraflex Cable Assembly x 3mt
	PS3609-40A Duraflex Cable Assembly x 4mt

*Denotes torch package standard wear part set-up

For more information please refer to the following sections:

*Master Wear Parts Table Page 42-54

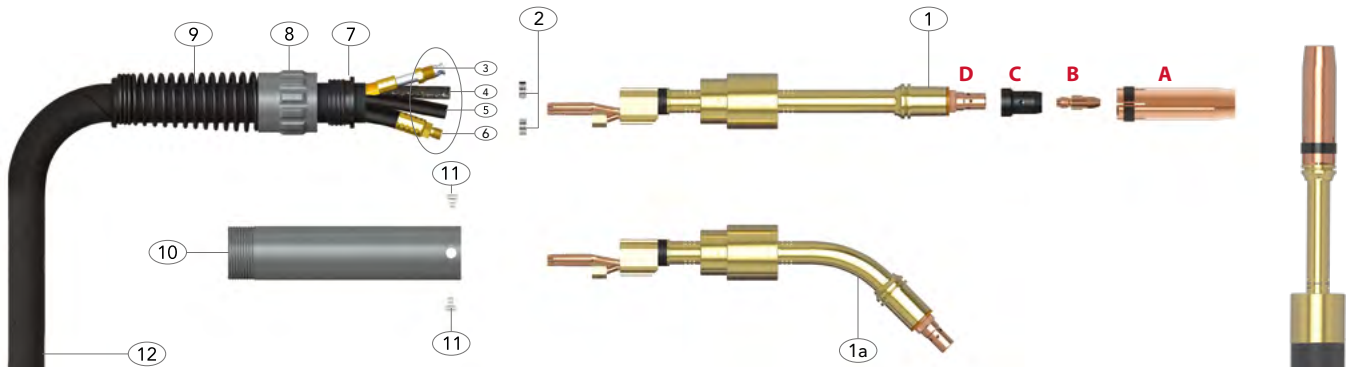

Torches

Description	Part No.		
	2mt	3mt	4mt
Liquid-Cooled Auto Torch Package	SB5000-20A	SB5000-30A	SB5000-40A
	SB5045-20A	SB5045-30A	SB5045-40A

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PB5027	Cylindrical Nozzle	19.0	2.50mm	Cu
*PB5028	Conical Nozzle	16.0	2.50mm	Cu
PB5028HD	Conical Nozzle	16.0	3.20mm	Cu
PB5029	Tapered Nozzle	14.0	2.50mm	Cu

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB4014-10	Contact Tip	Cu	1.0	0.040"
PB4014-12	Contact Tip	Cu	1.2	0.045"
PB4014-16	Contact Tip	Cu	1.6	0.063"
*PB4015-12	Contact Tip	CuCrZr	1.2	0.045"
PB4015-16	Contact Tip	CuCrZr	1.6	0.063"

C Diffusers

Part No.	Description	Colour	Material
PB5005B	Diffuser	Black	DMC3
PB5005C	Diffuser	White	Ceramic
PB5005W	Diffuser	White	DMC3
*PB5005H	High Performance	Black	HPP

D Tip Adaptors

Part No.	Description	Material
*PB5001	Tip Adaptor	Brass
PB5001C	Tip Adaptor	CuCrZr

*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54

E Liners


Part No.	Description	Length	Wire Size
*PB5033-20	Steel Liner x 2mt	2.5mt	1.0-1.2
*PB5033-30	Steel Liner x 3mt	3.5mt	1.0-1.2
*PB5033-40	Steel Liner x 4mt	4.5mt	1.0-1.2

Spare Parts

Part No.	Description
1	PG5002A Swan Neck Assembly
1a	PG5045A Swan Neck Assembly 45°
2	PB5041 Hose Clamp 8.7mm
7	PB8110A Auto Handle Insert
8	PB8030A Auto Handle Lock Nut
9	PB8017A Auto Handle Spring
10	PB3630 Automatic Handle
11	PB3629 Handle Screw
12	PS5006-20A Cable Assembly x 2mt
	PS5006-30A Cable Assembly x 3mt
	PS5006-40A Cable Assembly x 4mt

Cable Parts

Description	Part No.		
	2mt	3mt	4mt
3 Outer Liner Assembly	PS5008-20	PS5008-30	PS5008-40
4 Gas Hose Assembly	PE5013-20	PE5013-30	PE5013-40
5 Water Inlet Hose Assembly	PE5012-20	PE5012-30	PE5012-40
6 Power Cable Assembly	PE5015-20	PE5015-30	PE5015-40
13 Water Outlet Hose	PE5017	PE5017	PE5017

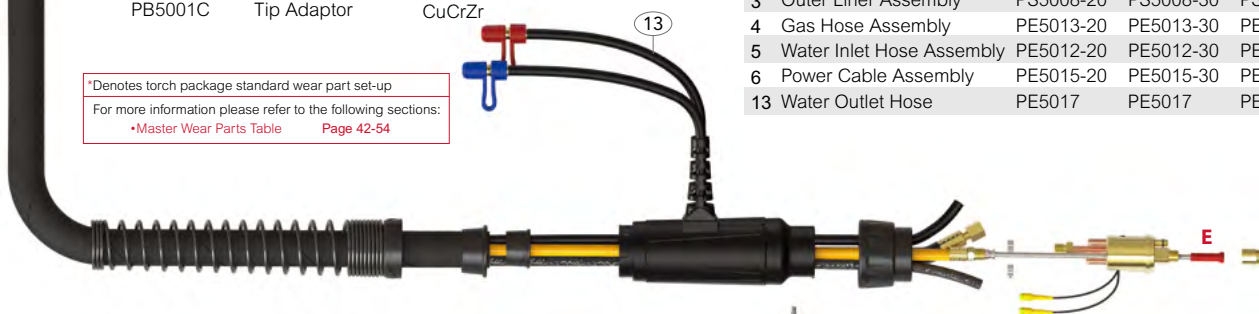

Contents

Duragrip BZL Mig/Mag Torch Range Features Focus	26
Duragrip BZL Mig/Mag Torch Range Overview and Ratings	27

Torch Range

Duragrip BZL DGB 150A	28
Duragrip BZL DGB 240A	29
Duragrip BZL DGB 250A	30
Duragrip BZL DGB 360A	31

Wear Parts

Nozzles	42
Contact Tips	45
Tip Adaptors	46
Diffusers	48
Liners	49

Air-Cooled

Duragrip BZL Mig/Mag Torch Range

Air-Cooled Features Focus

Same performance levels as the standard Suregrip BZL series but with fewer features and lower duty cycles.

Entry Level Welding Torches for The Cost Conscious



100% Binzel® Compatibility Guaranteed

Quality Wear Parts


All wear parts are manufactured to the same specification as the original manufacturer ensuring reliability, longevity and superior performance

- Contact tips are manufactured using quality copper alloys
- Standard performance tip adaptors, diffusers and swan necks

Flexibility and Durability

Duraflex Ultralite

- Cable sets offer the ultimate in heat and burn resistance.
- The addition of a knuckle joint enables small movements of the handle and neck independently of the cable assembly
- Cable supports are designed to combine flexibility and with smooth and consistent wire feeding

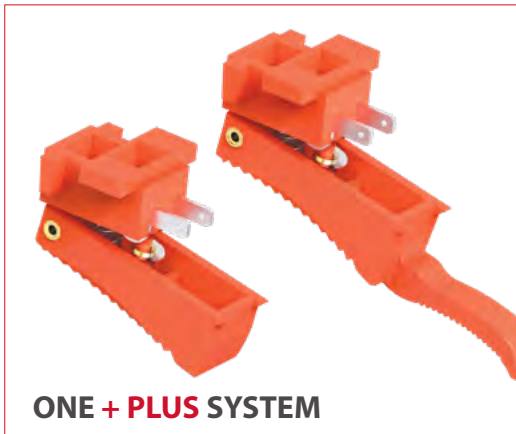

ONE + PLUS SYSTEM

"Plug and Play" Configurability

One + Plus system configured to your exact needs

- "Plug and play" switch interchangeability in seconds! - try it!
- Switches are available with standard and extended lever options



Duragrip BZL Mig/Mag Torch Range

Ratings: 150 Amp to 450 Amp, Mixed Gas




Model	DGB 150A	DGB 240A	DGB 250A	DGB 360A	
Technical Data					
Cooling Method	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled	
Rating: CO ₂	180A	250A	230A	320A	
Rating: Mixed Gas	150A	220A	200A	290A	
Duty Cycle	35%	35%	35%	35%	
Wire Size	0.6-1.0	0.8-1.2	0.8-1.2	0.8-1.2	
Minimum Water Flow	-	-	-	-	
Minimum Water Inlet Pressure	-	-	-	-	
Minimum Cooling Requirements	-	-	-	-	
Maximum Water Inlet Pressure	-	-	-	-	
Maximum Water Inlet Temperature	-	-	-	-	
Order Codes	4mt	DDU1500-40ER	DDU2400-40ER	DDU2500-40ER	DDU3600-40ER

DGB 150A Duragrip BZL Mig/Mag Torch Range

Rating: 180A CO₂, 150A mixed gas, EN60974-7 @ 35% duty cycle. 0.6 to 1.0mm wires

Air-Cooled Mig Welding Torch

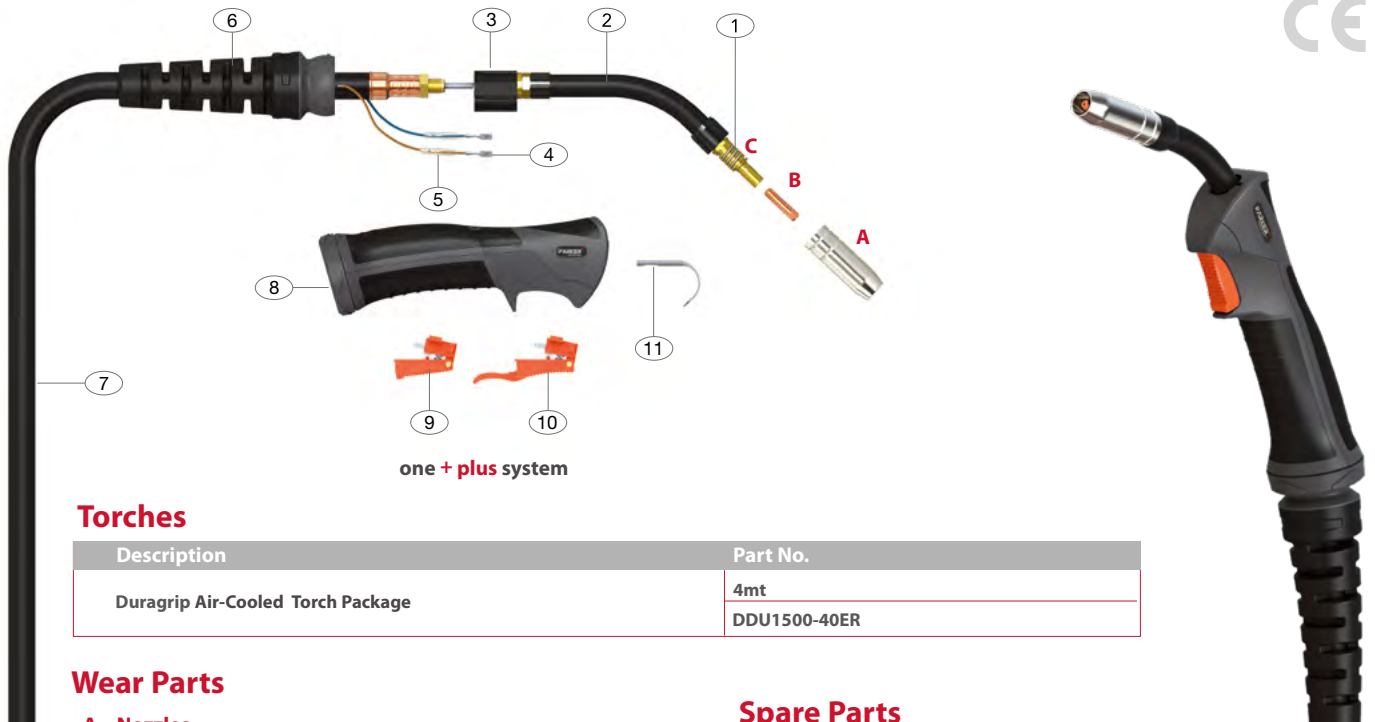

one + plus system

Torches

Description	Part No.
Duragrip Air-Cooled Torch Package	4mt DDU1500-40ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
*PC1530	Conical Nozzle	12.0	0.95mm	Brass

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB1527-06	Contact Tip	Cu	0.6	0.023"
*PB1527-08	Contact Tip	Cu	0.8	0.030"
PB1527-09	Contact Tip	Cu	0.9	0.035"
PB1527-10	Contact Tip	Cu	1.0	0.040"

C Tip Adaptors

Part No.	Description	Material
*PB1507L\H	Tip Adaptor Left Hand	Brass


D Liners

Part No.	Description	Length	Wire Size
*PE1535-40	Steel Liner x 4mt	4.4mt	0.6-0.9 mm

Spare Parts

Part No.	Description
1	PB1504 Shroud Spring
2	PE1501 Swan Neck Assembly
3	PG1515 Ergo Handle Location Body
4	PB1521 Cable Terminal
5	PB1521-C Cable Terminal Cover
6	PG8015 Handle Cable Support
7	PDU1517-40 Duraflex Ultralite Cable Assembly x 4mt
8	DGB2514 Ergo Handle Kit c/w Lock Nut
9	DGB2516 Standard Trigger Assembly
10	DGB2516L Extended Trigger Assembly
11	PB2517 Hanger Hook(Optional Extra)


*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54

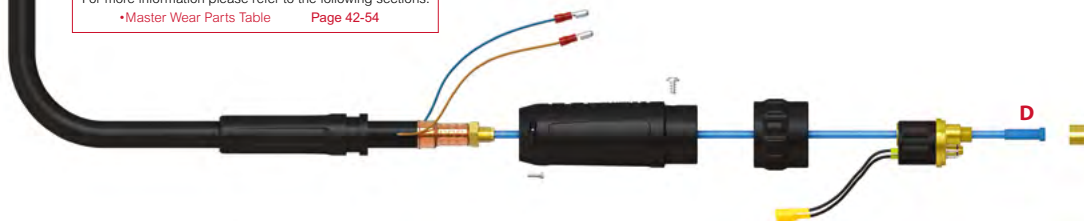

DGB 240A Duragrip Mig/Mag Torch Range

Rating: 250A CO₂, 220A mixed gas, EN60974-7 @ 35% duty cycle. 0.8 to 1.2mm wires

Air-Cooled Mig Welding Torch

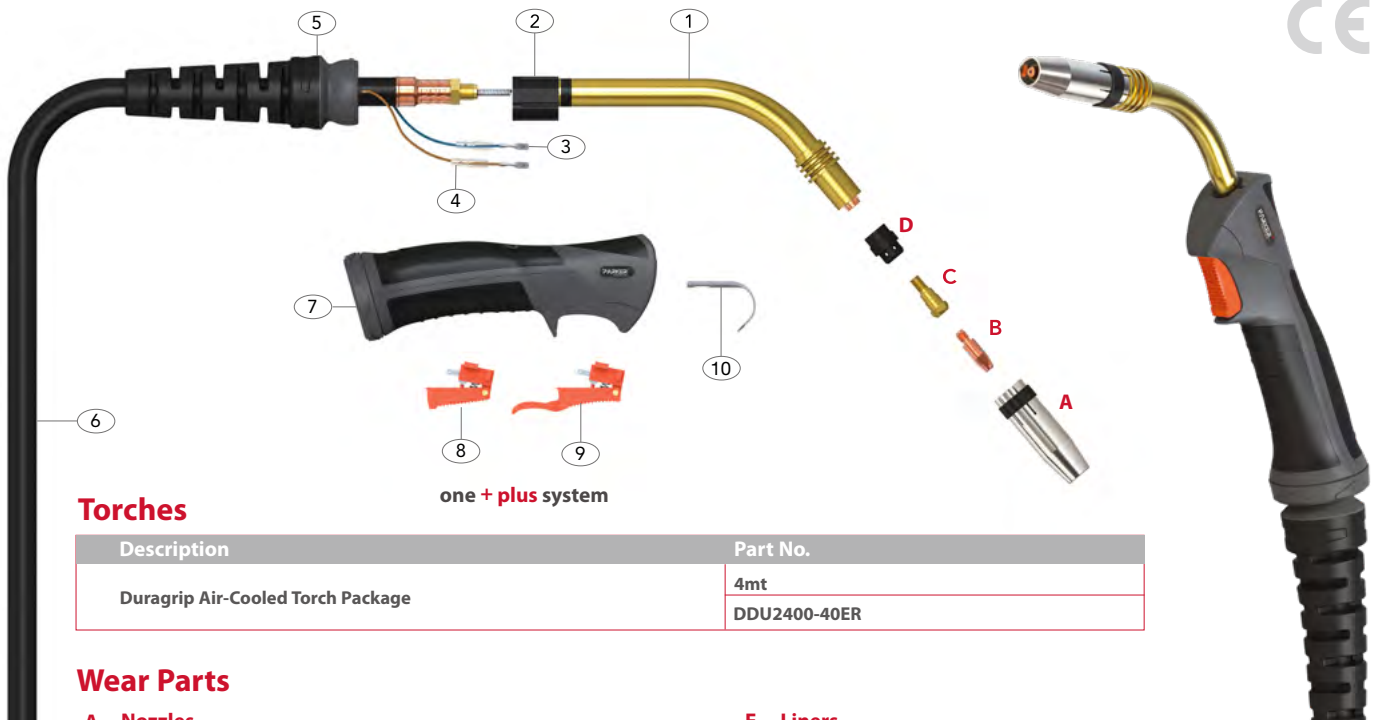

Torches

Description	Part No.
Duragrip Air-Cooled Torch Package	4mt DDU2400-40ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PB2415	Cylindrical Nozzle	17.2	1.40mm	Cu
*PB2416	Conical Nozzle	12.6	1.40mm	Cu
PB2417	Tapered Nozzle	10.0	1.40mm	Cu

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB2504-08	Contact Tip	Cu	0.8	0.030"
*PB2504-10	Contact Tip	Cu	1.0	0.040"
PB2504-12	Contact Tip	Cu	1.2	0.045"
PB2504-10A	Contact Tip	Cu	1.0	0.040"
PB2505-08	Contact Tip	CuCrZr	0.8	0.030"
PB2505-10	Contact Tip	CuCrZr	1.0	0.040"
PB2505-12	Contact Tip	CuCrZr	1.2	0.045"
PB2505-10A	Contact Tip	CuCrZr	1.0	0.040"

C Tip Adaptors

Part No.	Description	Material
*PB2412	Tip Adaptor	Brass

D Diffusers

Part No.	Description	Colour	Material
*PB2405B	Diffuser	Black	DMC3
PB2405C	Diffuser	White	Ceramic
PB2405W	Diffuser	White	DMC3
PB2405S	Diffuser	Red	Silicon


E Liners

Part No.	Description	Length	Wire Size
*PE2524-40	Steel Liner x 4mt	4.4mt	1.0-1.2 mm

Spare Parts


Part No.	Description
1	PE2401 Swan Neck Assembly
2	PG1515 Ergo Handle Location Body
3	PB1521 Cable Terminal
4	PB1521-C Cable Terminal Cover
5	PG8015 Handle Cable Support
6	PDU2403-40 Duraflex Ultralite Cable Assembly x 4mt
7	DGB2514 Ergo Handle Kit c/w Lock Nut
8	DGB2516 Standard Trigger Assembly
9	DGB2516L Extended Trigger Assembly
10	PB2517 Hanger Hook(Optional Extra)

*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54

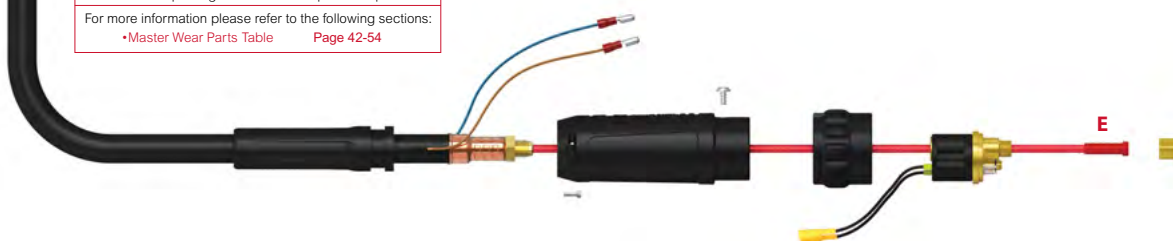

DGB 250A Duragrip Mig/Mag Torch Range

Rating: 230A CO₂, 200A mixed gas, EN60974-7 @ 35% duty cycle. 0.8 to 1.2mm wires
Air-Cooled Mig Welding Torch

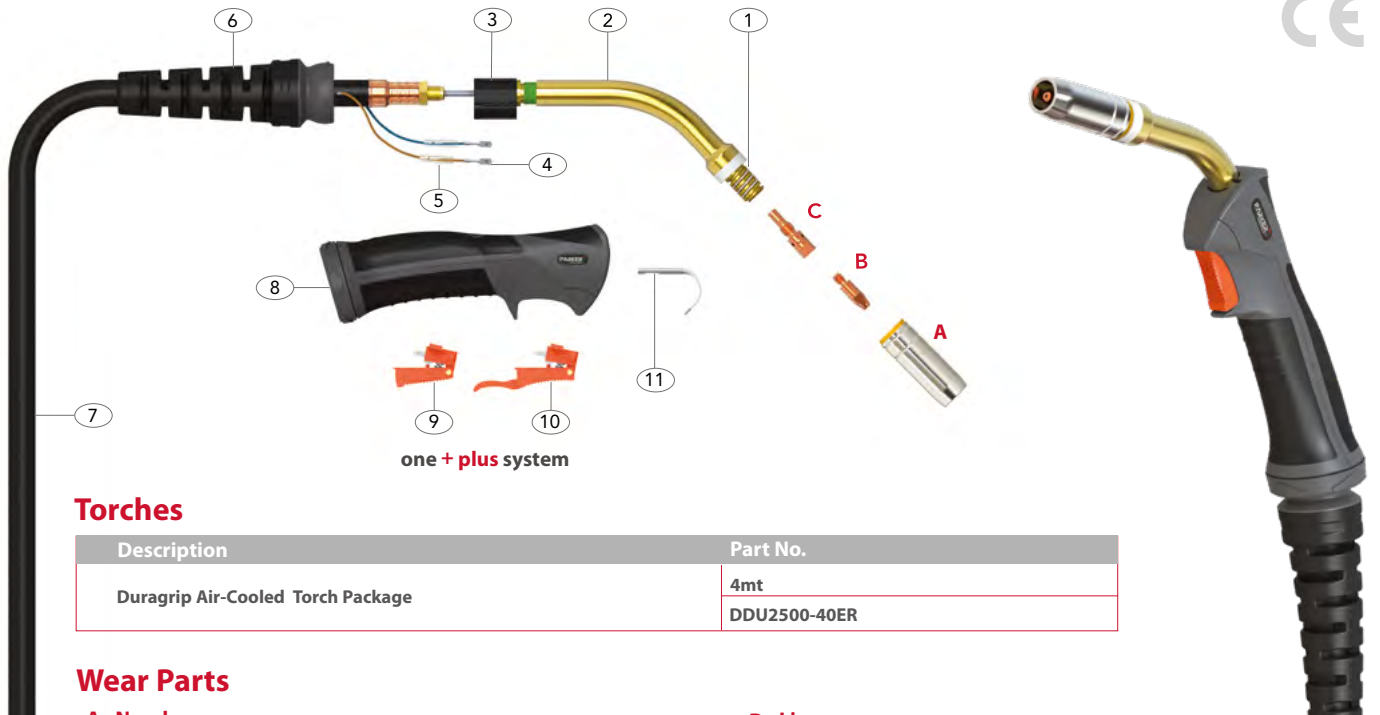

Torches

Description	Part No.
Duragrip Air-Cooled Torch Package	4mt DDU2500-40ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PC2507	Cylindrical Nozzle	19.0	1.25mm	Brass
*PC2508	Conical Nozzle	15.0	1.25mm	Brass
PC2509	Tapered Nozzle	12.0	1.25mm	Brass

D Liners

Part No.	Description	Length	Wire Size
*PE2524-40	Steel Liner x 4mt	4.4mt	mm 1.0-1.2

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB2504-08	Contact Tip	Cu	0.8	0.030"
*PB2504-10	Contact Tip	Cu	1.0	0.040"
PB2504-12	Contact Tip	Cu	1.2	0.045"
PB2504-10A	Contact Tip	Cu	1.0	0.040"
PB2505-08	Contact Tip	CuCrZr	0.8	0.030"
PB2505-10	Contact Tip	CuCrZr	1.0	0.040"
PB2505-12	Contact Tip	CuCrZr	1.2	0.045"
PB2505-10A	Contact Tip	CuCrZr	1.0	0.040"


Spare Parts

Part No.	Description
1	PB2502 Shroud Spring
2	PE2501 Swan Neck Assembly
3	PG1515 Ergo Handle Location Body
4	PB1521 Cable Terminal
5	PB1521-C Cable Terminal Cover
6	PG8015 Handle Cable Support
7	PDU2503-40 Duraflex Ultralite Cable Assembly x 4mt
8	DGB2514 Ergo Handle Kit c/w Lock Nut
9	DGB2516 Standard Trigger Assembly
10	DGB2516L Extended Trigger Assembly
11	PB2517 Hanger Hook(Optional Extra)

C Tip Adaptors

Part No.	Description	Material
*PB2506	Tip Adaptor	Brass
PB2536	Tip Adaptor M8	Brass


*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54

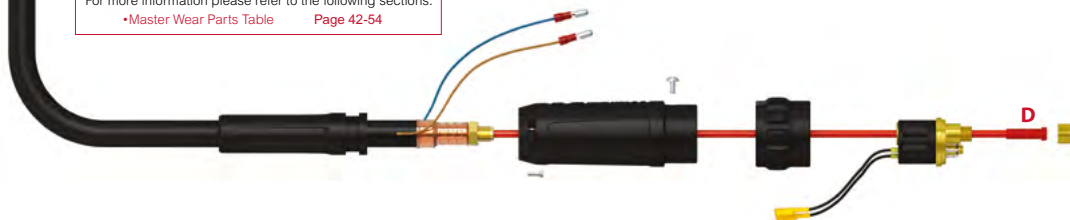

DGB 360A Duragrip Mig/Mag Torch Range

Rating: 320A CO₂, 290A mixed gas, EN60974-7 @ 35% duty cycle. 0.8 to 1.2mm wires

Air-Cooled Mig Welding Torch

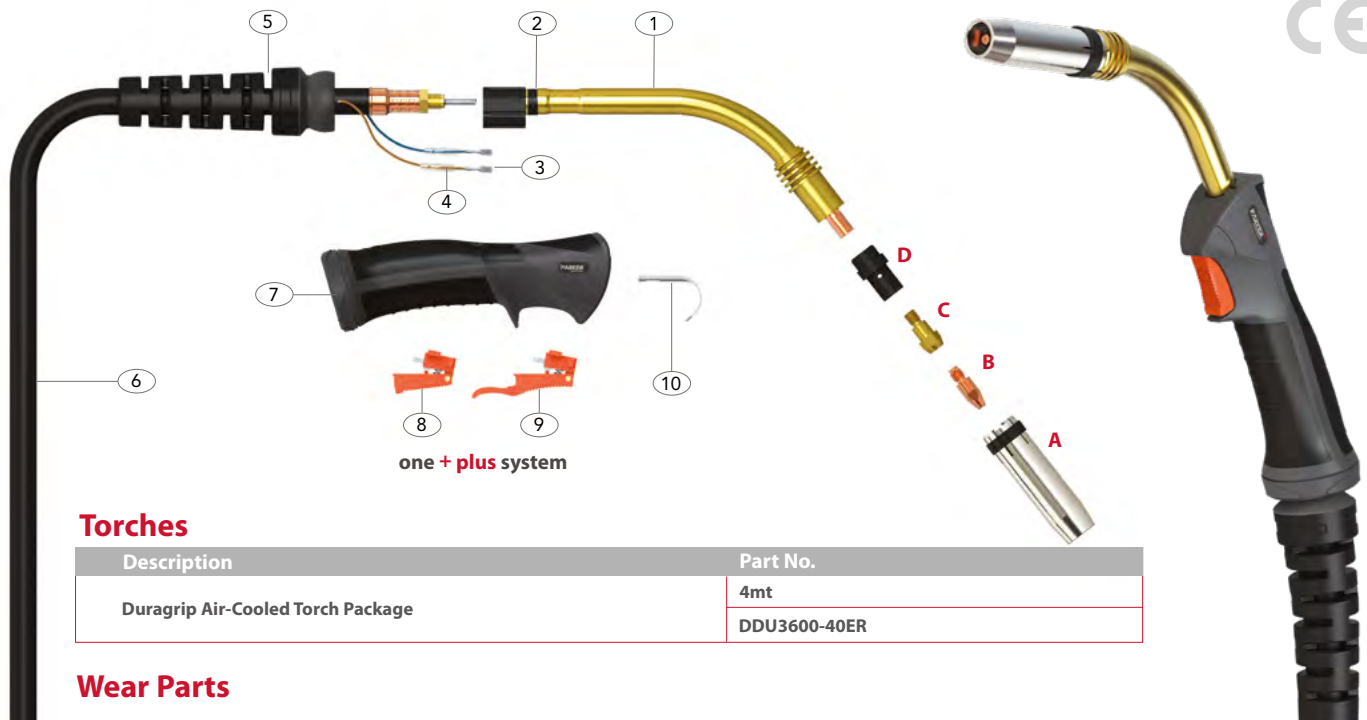

Torches

Description	Part No.
Duragrip Air-Cooled Torch Package	4mt DDU3600-40ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Wall	Material
PC3615	Cylindrical Nozzle	20.1	1.70mm	Cu
*PC3616	Conical Nozzle	16.0	1.70mm	Cu
PC3617	Tapered Nozzle	12.0	1.70mm	Cu

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB2504-08	Contact Tip	Cu	0.8	0.030"
PB2504-10	Contact Tip	Cu	1.0	0.040"
PB2504-12	Contact Tip	Cu	1.2	0.045"
PB2504-10A	Contact Tip	Cu	1.0	0.040"
PB2505-08	Contact Tip	CuCrZr	0.8	0.030"
PB2505-10	Contact Tip	CuCrZr	1.0	0.040"
PB2505-12	Contact Tip	CuCrZr	1.2	0.045"
PB2505-10A	Contact Tip	CuCrZr	1.0	0.040"
*PB4014-12	Contact Tip	Cu	1.2	0.045"

C Tip Adaptors

Part No.	Description	Material
PB3612	Tip Adaptor	Brass
PB3613	Tip Adaptor	Brass
*PB3614	Tip Adaptor	Brass

D Diffusers

Part No.	Description	Colour	Material
*PB3605B	Diffuser	Black	DMC3
PB3605C	Diffuser	White	Ceramic
PB3605W	Diffuser	White	DMC3

E Liners

Part No.	Description	Length	Wire Size
*PE2524-40	Steel Liner x 4mt	4.4mt	1.0-1.2


Spare Parts

Part No.	Description
1	PE3603 Swan Neck Assembly
2	PG1515 Ergo Handle Location Body
3	PB1521 Cable Terminal
4	PB1521-C Cable Terminal Cover
5	PG8016 Handle Cable Support
6	PDU3609-40 Duraflex Ultralite Cable Assembly x 4mt
7	DGB2514 Ergo Handle Kit c/w Lock Nut
8	DGB2516 Standard Trigger Assembly
9	DGB2516L Extended Trigger Assembly
10	PB2517 Hanger Hook(Optional Extra)

*Denotes torch package standard wear part set-up

For more information please refer to the following sections:

•Master Wear Parts Table Page 42-54

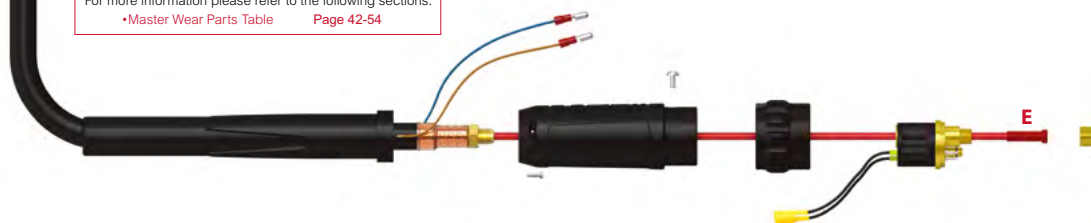

Contents

Suregrip A-LW Mig/Mag Torch Range Features Focus	34
Suregrip A-LW Mig/Mag Torch Range Overview and Ratings	36

Torch Range

Air-Cooled

Suregrip A-LW Mig/Mag SGA-LW155A	37
Suregrip A-LW Mig/Mag SGA-LW255A	38
Suregrip A-LW Mig/Mag SGA-LW305A	39
Suregrip A-LW Mig/Mag SGA-LW355A	40
Suregrip A-LW Mig/Mag SGA-LW455A	41

Wear Parts

Nozzles	42
Contact Tips	45
Tip Adaptors	46
Liners	49

Suregrip A-LW Mig/Mag Torch Range

Air-Cooled Features Focus

Air-Cooled

A new series of Suregrip BZL products with screw on nozzles and innovative lightweight cable sets.

Welding Tools for the Professional



100% Binzel® ALW Compatibility Guaranteed

Quality Wear Parts


All wear parts are manufactured to the same specification as the original manufacturer ensuring reliability, longevity and superior performance

- Contact tips are manufactured using high quality copper alloys
- Self insulated, screw on nozzles

Ergonomics – For Comfort and Handleability

Every detail has been considered to ensure the welder has the very best handling in all positions

- Screwless designed handle with maximized soft grips for improved balance and positionability
- Torch handles disassemble in 5 seconds for rapid fault analysis
- The addition of a knuckle joint enables small movements of the handle and neck independently of the cable assembly
- Cable supports are designed to combine flexibility with smooth and consistent wire feed

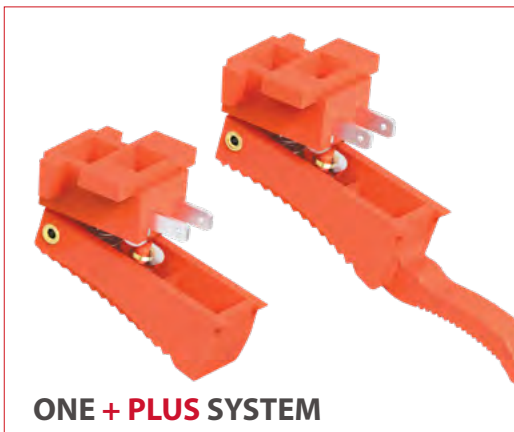


"Plug and Play" Configurability

One + Plus system configured to your exact needs

- "Plug and play" switch interchangeability in seconds! - try it!
- Switches are available with standard and extended lever options
- Micro-switch options for repetitive start/stop applications, digital power source control or harsh and dusty environments

Features Focus

World Class Welding Performance

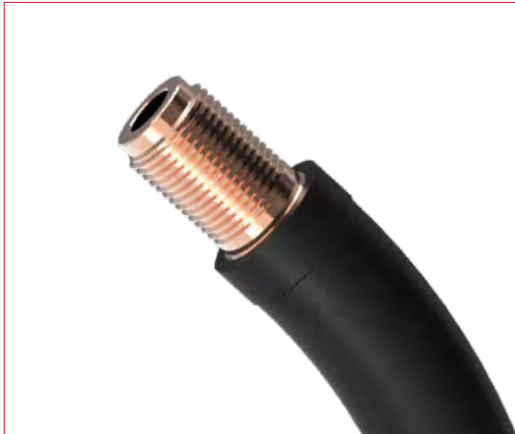

Swan Necks

Engineered For Extended Service Life

- Superior neck insulators are made from aluminum for enhanced service life
- Polymer armoured neck for increased durability and insulation integrity

Superior Flexibility, Durability - and Lightweight

Duraflex Ultralite

- Duraflex Ultralite cable sets offer the ultimate in heat and abrasion resistance, with the added benefit of being 30%-40% lighter

30%-40% Lighter



Ease of Maintenance

Functionality and ease of repair

- Screwless design solutions. Euro housing sets ensure minimum downtime and productivity – No tools required!
- The Euro body has been redesigned to improve gas seal integrity in Argon applications.
- Our spring pins – often copied,,, can't be beaten



The Smart Way To Buy Welding and Cutting Tools



Suregrip A-LW Mig/Mag Torch Range

Ratings: 170 Amp to 340 Amp Mixed Gas



Model	SGA-LW155A	SGA-LW255A	SGA-LW305A	SGA-LW355A	SGA-LW455A
Technical Data					
Cooling Method	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating: CO ₂	240A 190A	270A 240A	315A 270A	350A 300A	400A
Rating: Mixed Gas	220A 170A	240A 210A	300A 240A	320A 270A	340A
Duty Cycle	35% 60%	35% 60%	35% 60%	35% 60%	60%
Wire Size	0.6-1.0	0.8-1.2	0.8-1.2	1.0-1.6	1.0-2.4


Order Codes	3mt	SGA-LW155-30ER	SGA-LW255-30ER	SGA-LW305-30ER	SGA-LW355-30ER	SGA-LW455-30ER
	4mt	SGA-LW155-40ER	SGA-LW255-40ER	SGA-LW305-40ER	SGA-LW355-40ER	SGA-LW455-40ER
	5mt	SGA-LW155-50ER	SGA-LW255-50ER	SGA-LW305-50ER	SGA-LW355-50ER	SGA-LW455-50ER

SGA-LW155A Suregrip A-LW Mig/Mag Torch Range

Rating: 240A CO₂, 220A mixed gas, EN60974-7 @ 35% duty cycle. 0.6 to 1.0mm wires

190A CO₂, 170A mixed gas, EN60974-7 @ 60% duty cycle. 0.6 to 1.0mm wires

Air-Cooled Mig Welding Torch

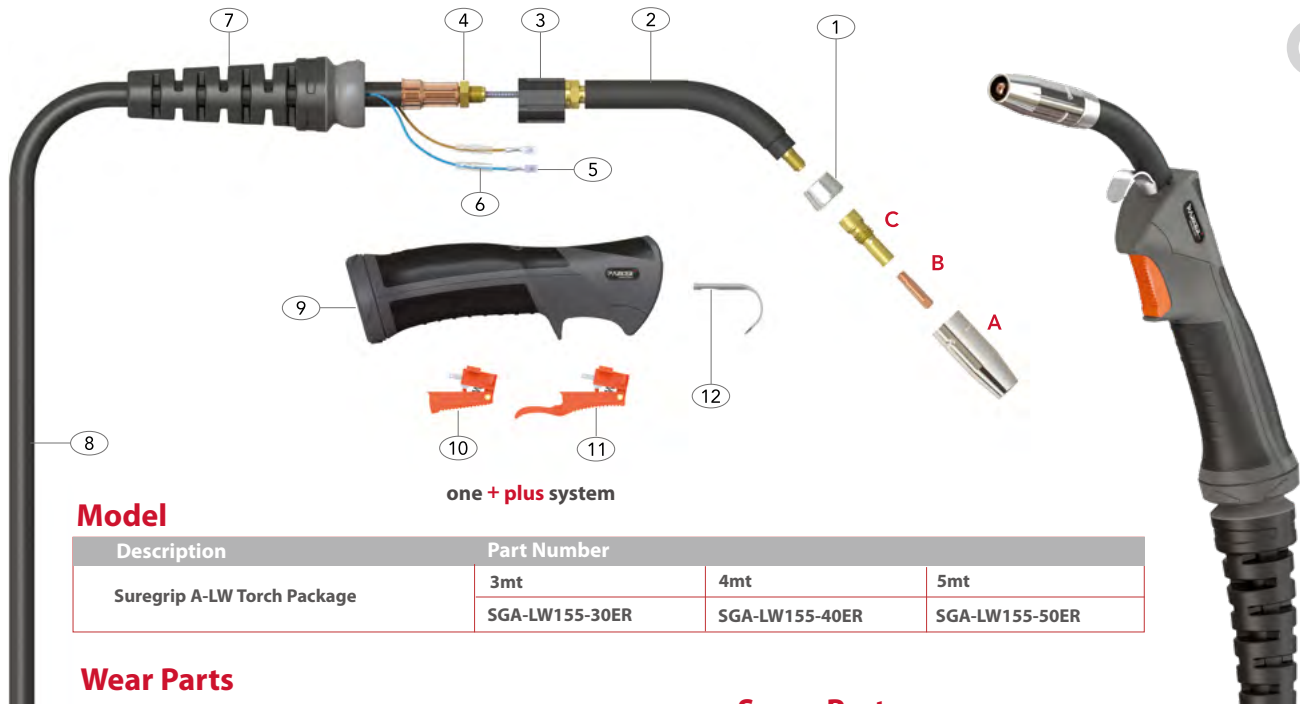

one + plus system

Model

Description	Part Number		
	3mt	4mt	5mt
Suregrip A-LW Torch Package	SGA-LW155-30ER	SGA-LW155-40ER	SGA-LW155-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Length	Wall	Material
PA1530	Conical Nozzle	12.0	52.0mm	1.50mm	Copper
*PA1530L	Conical Nozzle	12.0	54.0mm	1.50mm	Copper

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB1527-06	Contact Tip	Cu	0.6	0.023"
*PB1527-08	Contact Tip	Cu	0.8	0.030"
PB1527-10	Contact Tip	Cu	1.0	0.040"
PB1527-08A	Contact Tip	Cu	0.8	0.030"
PB1527-10A	Contact Tip	Cu	1.0	0.040"

C Tip Adaptors

Part No.	Description	Material
*PA1506	Tip Adaptor	Brass

D Liners

Part No.	Description	Length	Wire Size
			mm
*PB1535-30	Steel Liner x 3mt	3.4mt	0.6-0.9
*PB1535-40	Steel Liner x 4mt	4.4mt	0.6-0.9
*PB1535-50	Steel Liner x 5mt	5.4mt	0.6-0.9

Spare Parts

Part Number	Description
1	PA1552 Adaptor Piece
2	PA1551 Swan Neck Assembly
3	PG1515 Ergo Handle Location Body
4	PB1505 Lock Nut
5	PB1521 Cable Terminal
6	PB1521-C Cable Terminal Cover
7	PG8015 Handle Cable Support
8	PLW155-30 Cable Assembly x 3mt
	PLW155-40 Cable Assembly x 4mt
	PLW155-50 Cable Assembly x 5mt
9	SGB2514 Ergo Handle Kit c/w Lock Nut
10	DGB2516 Standard Trigger Assembly
11	DGB2516L Extended Trigger Assembly
12	PB2517 Hanger Hook

*Denotes torch package standard wear part set-up

For more information please refer to the following sections:


•Master Wear Parts Table Page 42-54



SGA-LW255A Suregrip A-LW Mig/Mag Torch Range

Rating: 270A CO₂, 240A mixed gas, EN60974-7 @ 35% duty cycle. 0.8 to 1.2mm wires
240A CO₂, 210A mixed gas, EN60974-7 @ 60% duty cycle. 0.8 to 1.2mm wires

Air-Cooled Mig Welding Torch

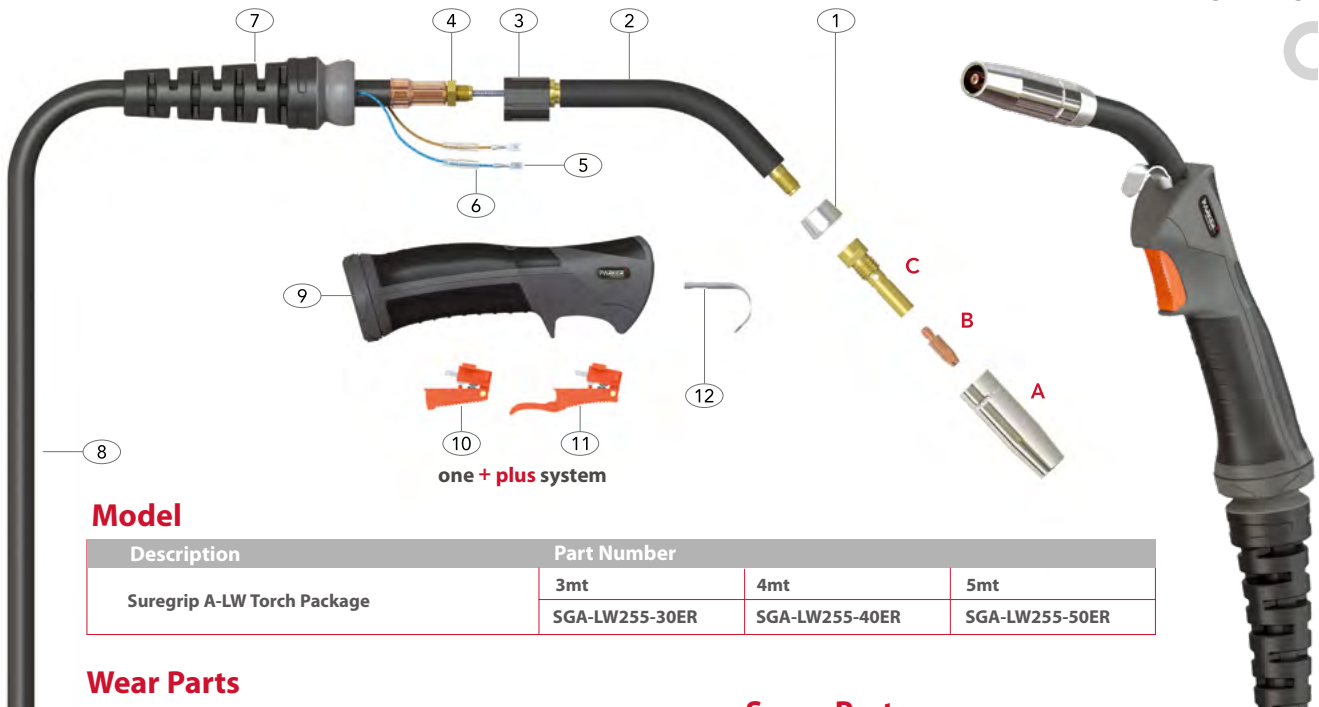

one + plus system

Model

Description	Part Number		
	3mt	4mt	5mt
Suregrip A-LW Torch Package	SGA-LW255-30ER	SGA-LW255-40ER	SGA-LW255-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Length	Wall	Material
*PA2508	Conical Nozzle	16.0	70.0mm	2.0mm	Copper
PA2510	Conical Nozzle	14.0	67.0mm	2.0mm	Copper

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB2504-08	Contact Tip	Cu	0.8	0.030
*PB2504-10	Contact Tip	Cu	1.0	0.040
PB2504-12	Contact Tip	Cu	1.2	0.045
PB2505-08	Contact Tip	CuCrZr	0.8	0.030
PB2505-09	Contact Tip	CuCrZr	0.9	0.035
PB2505-10	Contact Tip	CuCrZr	1.0	0.040
PB2505-12	Contact Tip	CuCrZr	1.2	0.045

C Tip Adaptors

Part No.	Description	Material
*PA2506	Tip Adaptor	Brass


D Liners

Part No.	Description	Length	Wire Size
*PB2524-30	Steel Liner x 3mt	3.4mt	1.0-1.2
*PB2524-40	Steel Liner x 4mt	4.4mt	1.0-1.2
*PB2524-50	Steel Liner x 5mt	5.4mt	1.0-1.2

Spare Parts

Part No.	Description
1	PA2552 Adaptor Piece
2	PA2551 Swan Neck Assembly
3	PG1515 Ergo Handle Location Body
4	PB1505 Lock Nut
5	PB1521 Cable Terminal
6	PB1521-C Cable Terminal Cover
7	PG8015 Handle Cable Support
8	PLW255-30 Cable Assembly x 3mt
	PLW255-40 Cable Assembly x 4mt
	PLW255-50 Cable Assembly x 5mt
9	SGB2514 Ergo Handle Kit c/w Lock Nut
10	DGB2516 Standard Trigger Assembly
11	DGB2516L Extended Trigger Assembly
12	PB2517 Hanger Hook

*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54

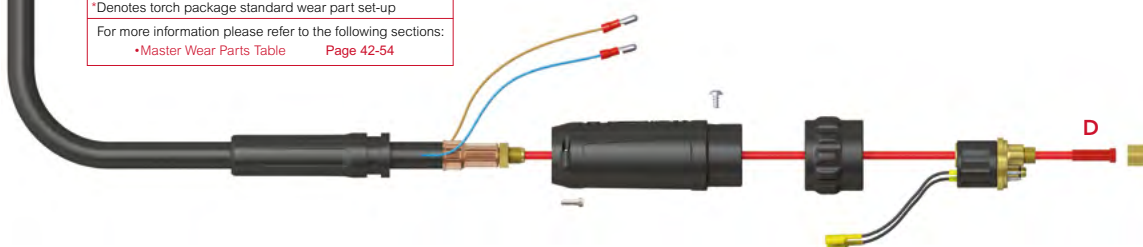


SGA-LW305A Suregrip A-LW Mig/Mag Torch Range

Rating: 315A CO₂, 300A mixed gas, EN60974-7 @ 35% duty cycle. 0.8 to 1.2mm wires

270A CO₂, 240A mixed gas, EN60974-7 @ 60% duty cycle. 0.8 to 1.2mm wires

Air-Cooled Mig Welding Torch

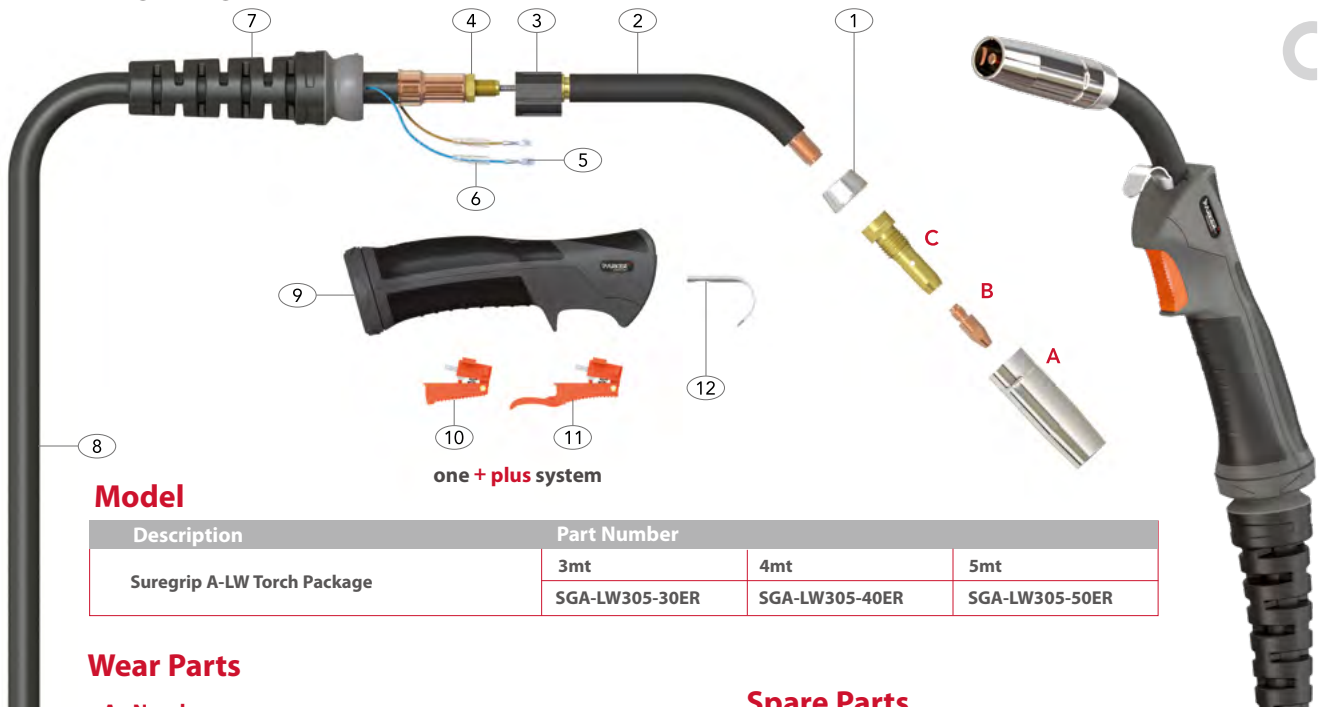

Model

Description	Part Number		
	3mt	4mt	5mt
Suregrip A-LW Torch Package	SGA-LW305-30ER	SGA-LW305-40ER	SGA-LW305-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Length	Wall	Material
*PA3515	Conical Nozzle	18.0	72.0mm	2.0mm	Copper
PA3516	Conical Nozzle	16.0	69.0mm	2.0mm	Copper

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB4014-08	Contact Tip	Cu	0.8	0.030
PB4014-10	Contact Tip	Cu	1.0	0.040
*PB4014-12	Contact Tip	Cu	1.2	0.045
PB4015-08	Contact Tip	CuCrZr	0.8	0.030
PB4015-10	Contact Tip	CuCrZr	1.0	0.040
PB4015-12	Contact Tip	CuCrZr	1.2	0.045

C Tip Adaptors

Part No.	Description	Material
*PA3506	Tip Adaptor	Brass


D Liners

Part No.	Description	Length	Wire Size
			mm
*PB2524-30	Steel Liner x 3mt	3.4mt	1.0-1.2
*PB2524-40	Steel Liner x 4mt	4.4mt	1.0-1.2
*PB2524-50	Steel Liner x 5mt	5.4mt	1.0-1.2

Spare Parts


Part Number	Description
1	PA3552 Adaptor Piece
2	PA3053 Swan Neck Assembly
3	PG1515 Ergo Handle Location Body
4	PB1505 Lock Nut
5	PB1521 Cable Terminal
6	PB1521-C Cable Terminal Cover
7	PG8016 Handle Cable Support
8	PLW305-30 Cable Assembly x 3mt
	PLW305-40 Cable Assembly x 4mt
	PLW305-50 Cable Assembly x 5mt
9	SGB2514 Ergo Handle Kit c/w Lock Nut
10	DGB2516 Standard Trigger Assembly
11	DGB2516L Extended Trigger Assembly
12	PB2517 Hanger Hook

*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54

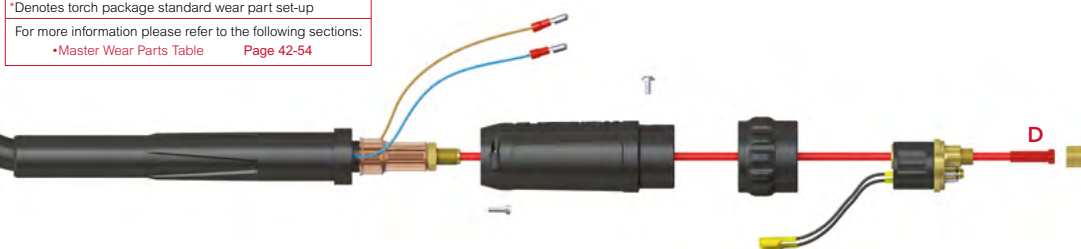

SGA-LW355A Suregrip A-LW Mig/Mag Torch Range

Rating: 350A CO₂, 320A mixed gas, EN60974-7 @ 35% duty cycle. 1.0 to 1.6mm wires
300A CO₂, 270A mixed gas, EN60974-7 @ 60% duty cycle. 1.0 to 1.6mm wires
Air-Cooled Mig Welding Torch

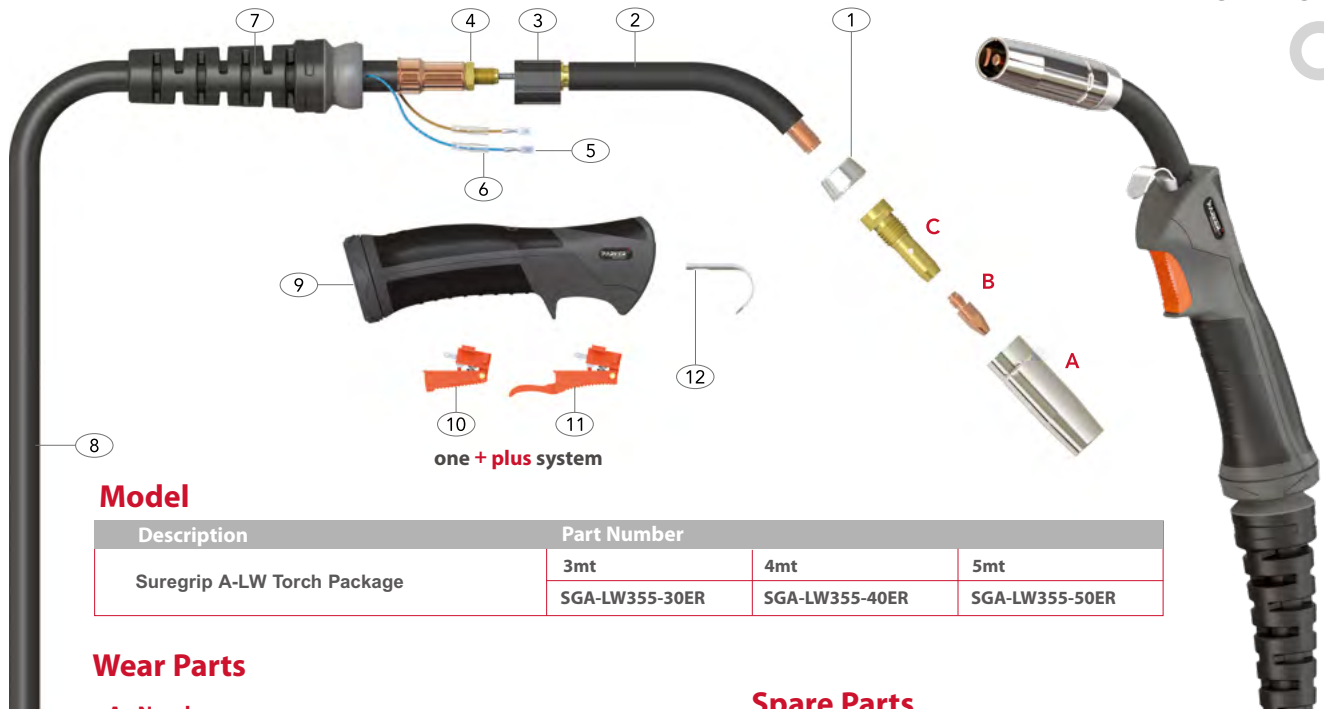

Model

Description	Part Number		
	3mt	4mt	5mt
Suregrip A-LW Torch Package	SGA-LW355-30ER	SGA-LW355-40ER	SGA-LW355-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Length	Wall	Material
*PA3515	Conical Nozzle	18.0	72.0mm	2.0mm	Copper
PA3516	Conical Nozzle	16.0	69.0mm	2.0mm	Copper

B Contact Tips

Part No.	Description	Material	Wire Size	
			mm	Inch
PB4014-10	Contact Tip	Cu	1.0	0.040
*PB4014-12	Contact Tip	Cu	1.2	0.045
PB4014-14	Contact Tip	Cu	1.4	0.055
PB4014-16	Contact Tip	Cu	1.6	0.063
PB4015-10	Contact Tip	CuCrZr	1.0	0.040
PB4015-12	Contact Tip	CuCrZr	1.2	0.045
PB4015-14	Contact Tip	CuCrZr	1.4	0.055
PB4015-16	Contact Tip	CuCrZr	1.6	0.063

C Tip Adaptors

Part No.	Description	Material
*PA3506	Tip Adaptor	Brass


D Liners

Part No.	Description	Length	Wire Size
			mm
*PB2524-30	Steel Liner x 3mt	3.4mt	1.0-1.2
*PB2524-40	Steel Liner x 4mt	4.4mt	1.0-1.2
*PB2524-50	Steel Liner x 5mt	5.4mt	1.0-1.2

Spare Parts


Part No.	Description
1	PA3552 Adaptor Piece
2	PA3553 Swan Neck Assembly
3	PG1515 Ergo Handle Location Body
4	PB1505 Lock Nut
5	PB1521 Cable Terminal
6	PB1521-C Cable Terminal Cover
7	PG8016 Handle Cable Support
8	PLW355-30 Cable Assembly x 3mt
	PLW355-40 Cable Assembly x 4mt
	PLW355-50 Cable Assembly x 5mt
9	SGB2514 Ergo Handle Kit c/w Lock Nut
10	DGB2516 Standard Trigger Assembly
11	DGB2516L Extended Trigger Assembly
12	PB2517 Hanger Hook

*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54

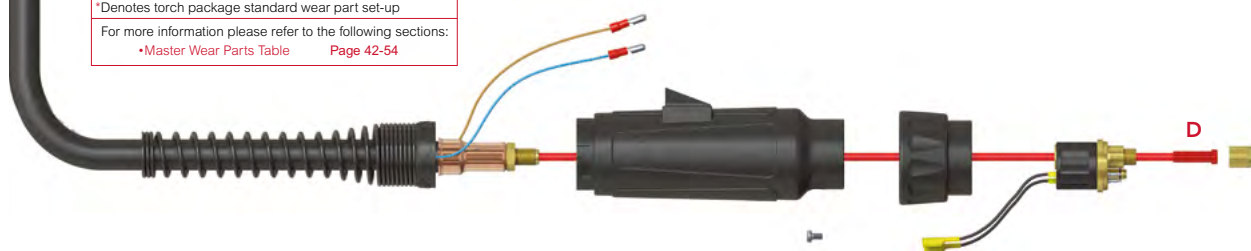

SGA-LW455A Suregrip A-LW Mig/Mag Torch Range

Rating: 400A CO₂, 340A mixed gas, EN60974-7 @ 60% duty cycle. 1.0 to 2.4mm wires
Air-Cooled Mig Welding Torch

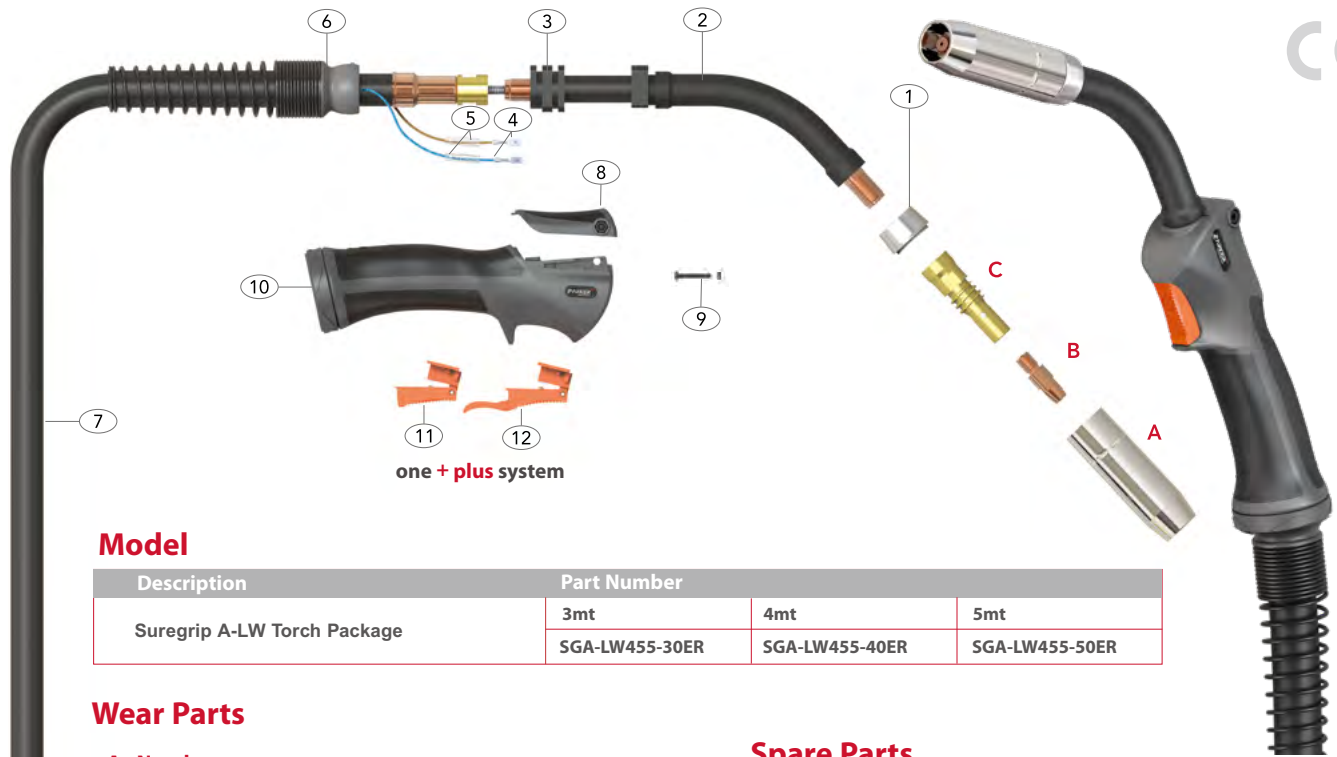

Model

Description	Part Number		
	3mt	4mt	5mt
Suregrip A-LW Torch Package	SGA-LW455-30ER	SGA-LW455-40ER	SGA-LW455-50ER

Wear Parts

A Nozzles

Part No.	Description	Bore	Length	Wall	Material
PA4527	Cylindrical Nozzle	24.0	83.0mm	2.0mm	Copper
*PA4528	Conical Nozzle	19.0	85.0mm	2.0mm	Copper
PA4529	Conical Nozzle	16.0	85.0mm	2.0mm	Copper

B Contact Tips

Part No.	Description	Material	Wire Size	Wire Size
			mm	inch
PB6015-10	Contact Tip	CuCrZr	1.0	0.040
*PB6015-12	Contact Tip	CuCrZr	1.2	0.045
PB6015-14	Contact Tip	CuCrZr	1.4	0.055
PB6015-16	Contact Tip	CuCrZr	1.6	0.063
PB6015-20	Contact Tip	CuCrZr	2.0	0.080
PB6015-24	Contact Tip	CuCrZr	2.4	0.095

C Tip Adaptors

Part No.	Description	Material
*PA4506	Tip Adaptor	Brass
PA4536	Tip Adaptor M8	Brass


D Liners

Part No.	Description	Length	Wire Size
			mm
*PB4531-30B	Steel Liner x 3mt	3.6mt	1.0-1.2
*PB4531-40B	Steel Liner x 4mt	4.6mt	1.0-1.2
*PB4531-50B	Steel Liner x 5mt	5.6mt	1.0-1.2

*Denotes torch package standard wear part set-up
For more information please refer to the following sections:
•Master Wear Parts Table Page 42-54


Spare Parts

Part Number	Description
1	PA4552 Adaptor Piece
2	PA4553 Swan Neck Assembly
3	PLW1515 Handle Location Body
4	PB1521 Cable Terminal
5	PB1521-C Cable Terminal Cover
6	PLW8018 Handle Cable Support c/w Ball Joint
7	PLW455-30 Cable Assembly x 3mt
	PLW455-40 Cable Assembly x 4mt
	PLW455-50 Cable Assembly x 5mt
8	PDM0 Top Housing With Grip
9	PDMNS Module Retaining Screw
10	PLW2515-KJ Handle Kit
11	DGBH2516M Trigger Assembly
12	DGBH2516LM Extended Trigger Assembly

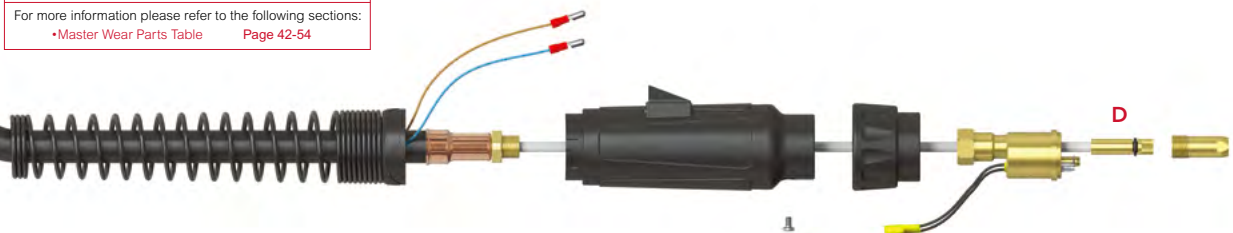

SGB/SGF 150A

Part No.	Description	Bore	Wall	Material
PB1529	Cylindrical Nozzle	16.0	0.9mm	Cu
*PB1530	Conical Nozzle	12.0	0.9mm	Cu
PB1531	Tapered Nozzle	10.5	0.9mm	Cu
PB1532	Bottle Nozzle	12.8	0.9mm	Cu
PB1533	Spot Welding Nozzle	16.0	0.9mm	Cu

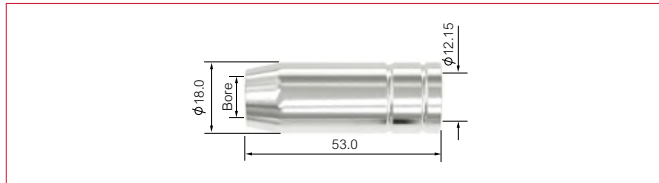

SGB/SGF 250A/SB 250A Auto

Part No.	Description	Bore	Wall	Material
PB2507	Cylindrical Nozzle	18.0	1.5mm	Cu
*PB2508	Conical Nozzle	15.0	1.5mm	Cu
PB2509	Tapered Nozzle	12.0	1.5mm	Cu
PB2510	Bottle Nozzle	14.5	1.5mm	Cu
PB2511	Spot Welding Nozzle	18.0	1.5mm	Cu




SGB 240A

Part No.	Description	Bore	Wall	Material
PB2415	Cylindrical Nozzle	17.2	1.40mm	Cu
*PB2416	Conical Nozzle	12.6	1.40mm	Cu
PB2417	Tapered Nozzle	10.0	1.40mm	Cu



SGB 380A/501W/555W/SB 501W Auto

Part No.	Description	Bore	Wall	Material
PB5027	Cylindrical Nozzle	19.0	2.50mm	Cu
*PB5028	Conical Nozzle	16.0	2.50mm	Cu
PB5028HD	Conical Nozzle	16.0	3.20mm	Cu
PB5029	Tapered Nozzle	14.0	2.50mm	Cu

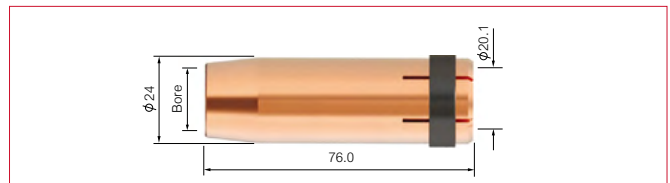

SGB 360A/SB 360A Auto


Part No.	Description	Bore	Wall	Material
PB3615	Cylindrical Nozzle	19.0	2.25mm	Cu
*PB3616	Conical Nozzle	16.1	2.25mm	Cu
PB3617	Tapered Nozzle	12.0	2.25mm	Cu



Nozzle Adaptors


SGB 605W

Part No.	Description	Material
*PB6515	Nozzle Adaptor	Brass

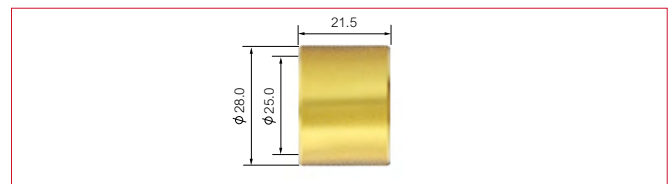

SGB 605W

Part No.	Description	Bore	Wall	Material
*PB6528	Conical Nozzle	17.0	2.60mm	Cu

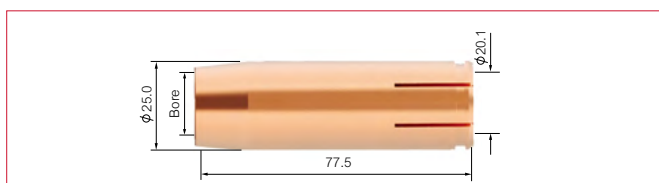


* Denotes torch package standard wear part set-up

Nozzles

DGB 150A

Part No.	Description	Bore	Wall	Material
*PC1530	Conical Nozzle	12.0	0.95mm	Brass

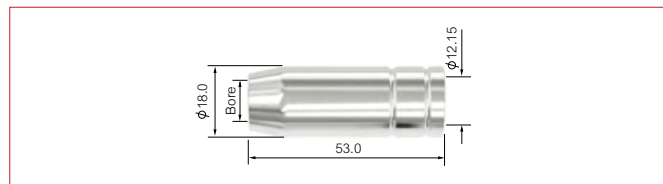


DGB 250A

Part No.	Description	Bore	Wall	Material
PC2507	Cylindrical Nozzle	19.0	1.25mm	Brass
*PC2508	Conical Nozzle	15.0	1.25mm	Brass
PC2509	Tapered Nozzle	12.0	1.25mm	Brass



DGB 240A

Part No.	Description	Bore	Wall	Material
PB2415	Cylindrical Nozzle	17.2	1.40mm	Cu
*PB2416	Conical Nozzle	12.6	1.40mm	Cu
PB2417	Tapered Nozzle	10.0	1.40mm	Cu

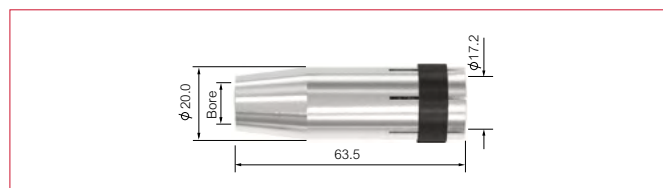

DGB 360A

Part No.	Description	Bore	Wall	Material
PC3615	Cylindrical Nozzle	20.1	1.70mm	Brass
*PC3616	Conical Nozzle	16.0	1.70mm	Brass
PC3617	Tapered Nozzle	12.0	1.70mm	Brass



* Denotes torch package standard wear part set-up

A-LW Nozzles

SGA-LW155A

Part No.	Description	Bore	Length	Wall	Material
PA1530	Conical Nozzle	12.0	52.0mm	1.5mm	Copper
* PA1530L	Conical Nozzle	12.0	54.0mm	1.5mm	Copper



SGA-LW255A

Part No.	Description	Bore	Length	Wall	Material
* PA2508	Conical Nozzle	16.0	70.0mm	2.0mm	Copper
PA2510	Conical Nozzle	14.0	67.0mm	2.0mm	Copper



SGA-LW305A/355A

Part No.	Description	Bore	Length	Wall	Material
* PA3515	Conical Nozzle	18.0	72.0mm	2.0mm	Copper
PA3516	Conical Nozzle	16.0	69.0mm	2.0mm	Copper



SGA-LW455A

Part No.	Description	Bore	Length	Wall	Material
PA4527	Cylindrical Nozzle	24.0	83.0mm	2.0mm	Copper
* PA4528	Conical Nozzle	19.0	85.0mm	2.0mm	Copper
PA4529	Conical Nozzle	16.0	85.0mm	2.0mm	Copper




* Denotes torch package standard wear part set-up

Contact Tips


DGB/SGB/SGF 150A/SGA-LW155A

Part No.	Description	Material	Wire Size	
			mm	inch
PB1527-06	Contact Tip	Cu	0.6	0.023
* PB1527-08	Contact Tip	Cu	0.8	0.030
PB1527-09	Contact Tip	Cu	0.9	0.035
PB1527-10	Contact Tip	Cu	1.0	0.040
PB1527-12	Contact Tip	Cu	1.2	0.045

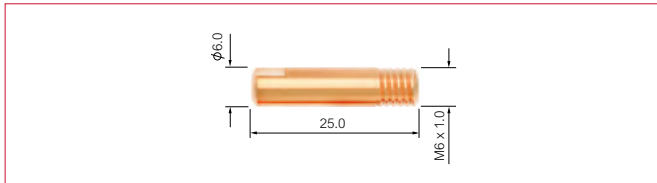


DGB/SGB 240A/250A/360A/SGF 250A/ SB 250A Auto/360A Auto/SGA-LW255A

Part No.	Description	Material	Wire Size	
			mm	inch
PB2504-06	Contact Tip	Cu	0.6	0.023
PB2504-08	Contact Tip	Cu	0.8	0.030
PB2504-09	Contact Tip	Cu	0.9	0.035
* PB2504-10	Contact Tip	Cu	1.0	0.040
PB2504-12	Contact Tip	Cu	1.2	0.045
PB2504-14	Contact Tip	Cu	1.4	0.055
PB2504-16	Contact Tip	Cu	1.6	0.063
PB2504-10A	Contact Tip	Cu	1.0	0.040
PB2504-12A	Contact Tip	Cu	1.2	0.045
PB2504-16A	Contact Tip	Cu	1.6	0.063

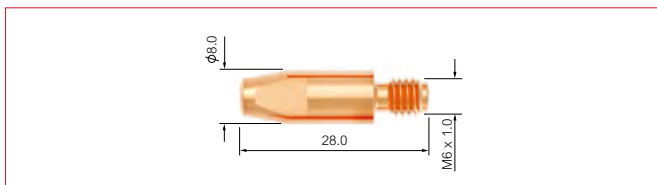


PB2505-08	Contact Tip	CuCrZr	0.8	0.030
PB2505-09	Contact Tip	CuCrZr	0.9	0.035
PB2505-10	Contact Tip	CuCrZr	1.0	0.040
PB2505-12	Contact Tip	CuCrZr	1.2	0.045
PB2505-16	Contact Tip	CuCrZr	1.6	0.063
PB2505-10A	Contact Tip	CuCrZr	1.0	0.040
PB2505-12A	Contact Tip	CuCrZr	1.2	0.045
PB2505-16A	Contact Tip	CuCrZr	1.6	0.063

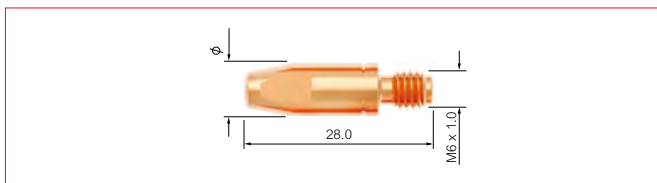


DGB/SGB 360A/SGB 380A/501W/555W/ SB 360A Auto/501W Auto/ SGA-LW305A/355A/455A

Part No.	Description	Material	Wire Size	
			mm	inch
PB4014-08	Contact Tip	Cu	0.8	0.030
PB4014-09	Contact Tip	Cu	0.9	0.035
PB4014-10	Contact Tip	Cu	1.0	0.040
* PB4014-12	Contact Tip	Cu	1.2	0.045
PB4014-14	Contact Tip	Cu	1.4	0.055
PB4014-16	Contact Tip	Cu	1.6	0.063
PB4014-20	Contact Tip	Cu	2.0	0.080
PB4014-24	Contact Tip	Cu	2.4	0.095
PB4014-10A	Contact Tip	Cu	1.0	0.040
PB4014-12A	Contact Tip	Cu	1.2	0.045
PB4014-16A	Contact Tip	Cu	1.6	0.063

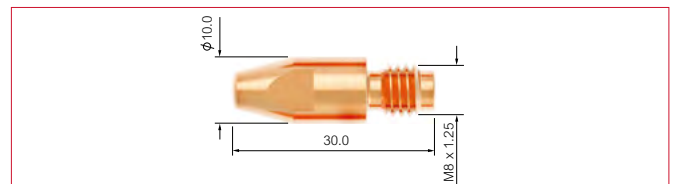


PB4015-08	Contact Tip	CuCrZr	0.8	0.030
PB4015-09	Contact Tip	CuCrZr	0.9	0.035
PB4015-10	Contact Tip	CuCrZr	1.0	0.040
* PB4015-12	Contact Tip	CuCrZr	1.2	0.045
PB4015-13	Contact Tip	CuCrZr	1.3	0.052
PB4015-14	Contact Tip	CuCrZr	1.4	0.055
PB4015-16	Contact Tip	CuCrZr	1.6	0.063
PB4015-20	Contact Tip	CuCrZr	2.0	0.080
PB4015-24	Contact Tip	CuCrZr	2.4	0.095
PB4015-10A	Contact Tip	CuCrZr	1.0	0.040
PB4015-12A	Contact Tip	CuCrZr	1.2	0.045
PB4015-16A	Contact Tip	CuCrZr	1.6	0.063

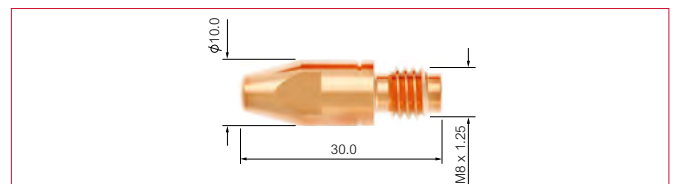

SGB 605W/SGA-LW455A

Part No.	Description	Material	Wire Size	
			mm	inch
PB6015-10	Contact Tip	CuCrZr	1.0	0.040
* PB6015-12	Contact Tip	CuCrZr	1.2	0.045
PB6015-14	Contact Tip	CuCrZr	1.4	0.055
PB6015-16	Contact Tip	CuCrZr	1.6	0.063
PB6015-20	Contact Tip	CuCrZr	2.0	0.080
PB6015-24	Contact Tip	CuCrZr	2.4	0.095

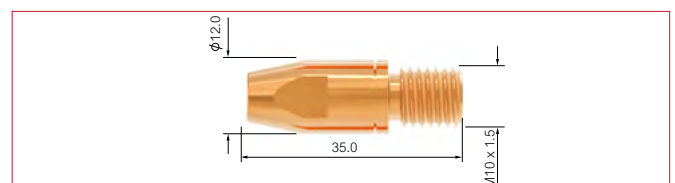


* Denotes torch package standard wear part set-up

Tip Adaptors


DGB/SGB/SGF 150A

Part No.	Description	Material
PB1507	Tip Adaptor	Brass
* PB1507LH	Tip Adaptor Left Hand	Brass

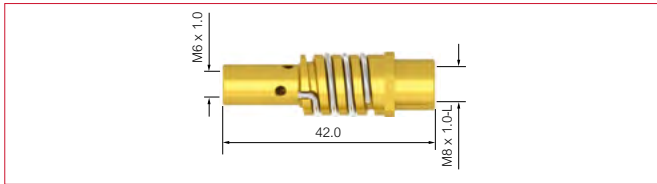


DGB/SGB 360A/SB 360A Auto

Part No.	Description	Material
PB3612	Tip Adaptor 28.5mm M6	Brass
PB3613	Tip Adaptor 31.5mm M6	Brass
* PB3614	Tip Adaptor 28.5mm M8	Brass

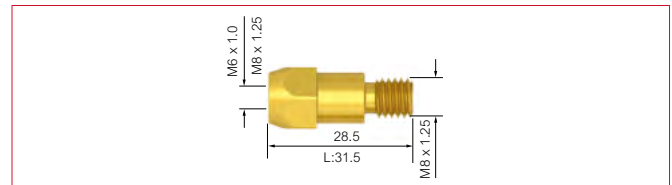


DGB/SGB/SGF 250A/SB 250A Auto

Part No.	Description	Material
* PB2506	Tip Adaptor	Brass

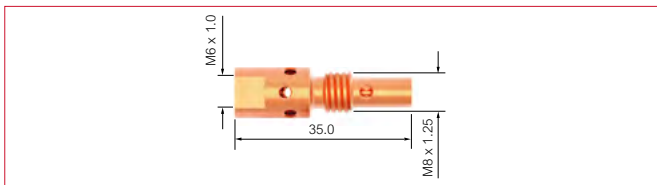


PB2536	Tip Adaptor M8	Brass
--------	----------------	-------

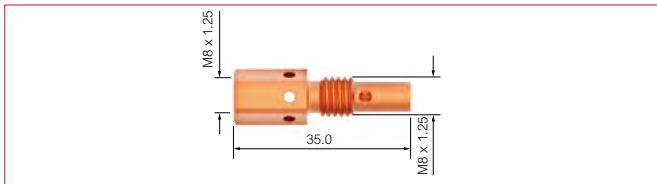


SGB 380A

Part No.	Description	Material
* PB3812	Tip Adaptor	Brass

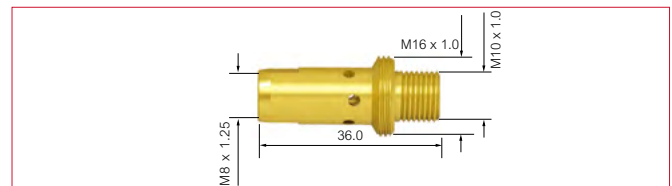


DGB/SGB 240A

Part No.	Description	Material
* PB2412	Tip Adaptor	Brass

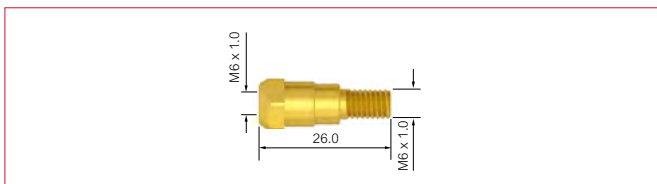


SGB 501W/SB 501W Auto

Part No.	Description	Material
* PB5001	Tip Adaptor	Brass
* PB5001C	Tip Adaptor	CuCrZr

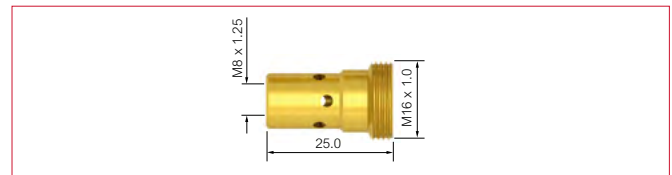

PB5001L	Tip Adaptor	Brass
---------	-------------	-------

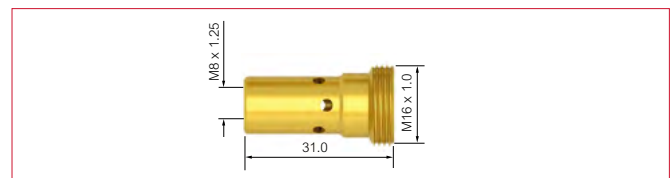


* Denotes torch package standard wear part set-up

Tip Adaptors


SGB 555W

Part No.	Description	Material
* PB5501	Tip Adaptor	CuCrZr

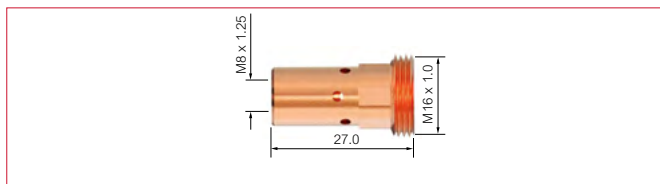


SGB 605W

Part No.	Description	Material
* PB6501	Tip Adaptor 29.0mm M10	CuCrZr

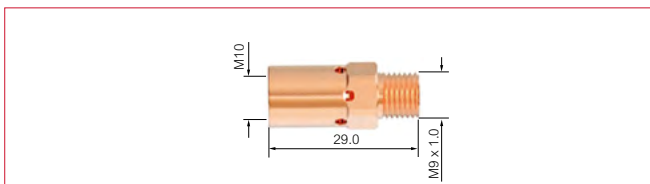


SGA-LW155A

Part No.	Description	Material
* PA1506	Tip Adaptor	Brass

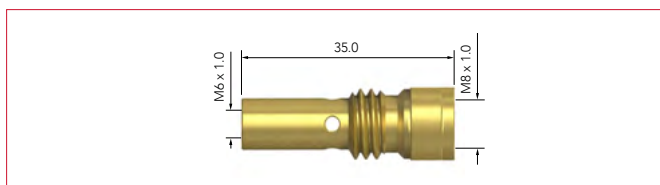


SGA-LW255A

Part No.	Description	Material
* PA2506	Tip Adaptor	Brass

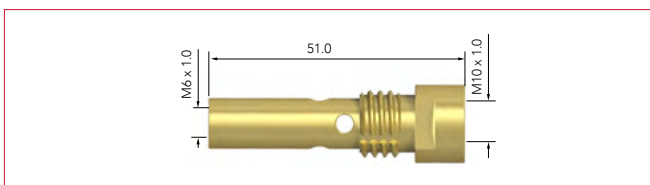


SGA-LW305A/355A

Part No.	Description	Material
* PA3506	Tip Adaptor	Brass

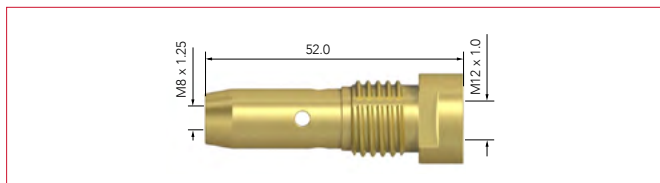


SGA-LW455A

Part No.	Description	Material
* PA4506	Tip Adaptor	Brass

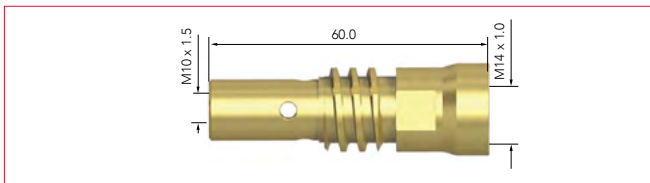


PA4536	Tip Adaptor M8	Brass
--------	----------------	-------

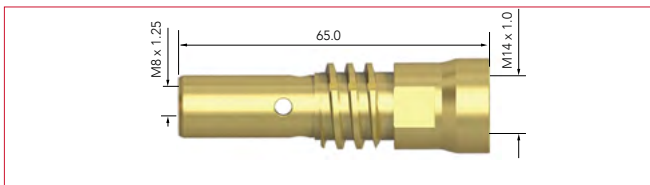

* Denotes torch package standard wear part set-up


DGB/SGB 240A

Part No.	Description	Colour	Material
* PB2405B	Diffuser	Black	DMC3
PB2405C	Diffuser	White	Ceramic
PB2405W	Diffuser	White	DMC3
PB2405S	Diffuser	Red	Silicon

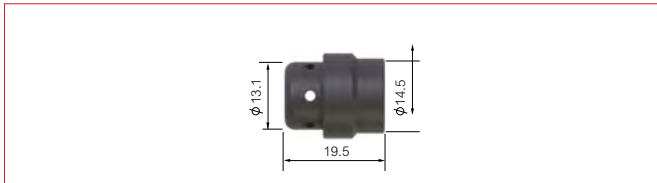


DGB/SGB 360A/SB 360A Auto

Part No.	Description	Colour	Material
* PB3605B	Diffuser	Black	DMC3
PB3605C	Diffuser	White	Ceramic
PB3605W	Diffuser	White	DMC3
PB3605H	High Performance	Black	HPP

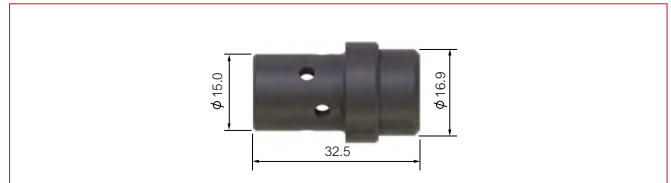

SGB 380A/501W/555W/SB 501W Auto

Part No.	Description	Colour	Material
* PB5005B	Diffuser	Black	DMC3
PB5005C	Diffuser	White	Ceramic
PB5005W	Diffuser	White	DMC3
* PB5005H	High Performance	Black	HPP

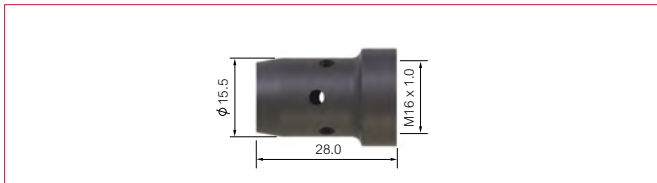

SGB 605W

Part No.	Description	Colour	Material
* PB6505H	High Performance	Black	DMC3



* Denotes torch package standard wear part set-up

Liner Options 0.6-1.2mm

DGB 150A/240A/250A/360A

Part No.	Description	Length	Nipple	Wire Size mm
* PE1535-30	Steel Liner x 3mt	3.4mt	Moulded Nipple	0.6-0.9
* PE1535-40	Steel Liner x 4mt	4.4mt	Moulded Nipple	0.6-0.9
* PE1535-50	Steel Liner x 5mt	5.4mt	Moulded Nipple	0.6-0.9




DGB/SGB/SGF 150A/240A/250A/360A/SB 250A Auto/360A Auto/SGA-LW155A/255A/305A

Part No.	Description	Length	Nipple	Wire Size mm
* PB1535-30	Steel Liner x 3mt	3.4mt	Moulded Nipple	0.6-0.9
* PB1535-40	Steel Liner x 4mt	4.4mt	Moulded Nipple	0.6-0.9
* PB1535-50	Steel Liner x 5mt	5.4mt	Moulded Nipple	0.6-0.9



Part No.	Description	Length	Nipple	Wire Size mm
PB1535-30B	Steel Liner x 3mt	3.4mt	Brass Nipple	0.6-0.9
PB1535-40B	Steel Liner x 4mt	4.4mt	Brass Nipple	0.6-0.9
PB1535-50B	Steel Liner x 5mt	5.4mt	Brass Nipple	0.6-0.9



PB1536-30	Teflon Liner x 3mt	3.6mt	Brass Nipple	0.6-0.9
PB1536-40	Teflon Liner x 4mt	4.6mt	Brass Nipple	0.6-0.9
PB1536-50	Teflon Liner x 5mt	5.6mt	Brass Nipple	0.6-0.9
PNE1564	Optional Brass Neck Liner	0.3mt	Brass Nipple	0.8-1.2



PB1564-30	Polyamide/Brass Liner x 4.0mm O/D x 3mt	3.6mt	Brass Nipple	0.8-1.2
PB1564-40	Polyamide/Brass Liner x 4.0mm O/D x 4mt	4.6mt	Brass Nipple	0.8-1.2
PB1564-50	Polyamide/Brass Liner x 4.0mm O/D x 5mt	5.6mt	Brass Nipple	0.8-1.2



* Denotes torch package standard wear part set-up

Liner Options 1.0-1.2mm

DGB 240A/250A/360A

Part No.	Description	Length	Nipple	Wire Size mm
* PE2524-30	Steel Liner x 3mt	3.4mt	Moulded Nipple	1.0-1.2
* PE2524-40	Steel Liner x 4mt	4.4mt	Moulded Nipple	1.0-1.2
* PE2524-50	Steel Liner x 5mt	5.4mt	Moulded Nipple	1.0-1.2



DGB/SGB 240A/250A/360A/SGB 380A/SB 250A Auto/360A Auto/SGA-LW155A/255A/305A/355A

Part No.	Description	Length	Nipple	Wire Size mm
* PB2524-30	Steel Liner x 3mt	3.4mt	Moulded Nipple	1.0-1.2
* PB2524-40	Steel Liner x 4mt	4.4mt	Moulded Nipple	1.0-1.2
* PB2524-50	Steel Liner x 5mt	5.4mt	Moulded Nipple	1.0-1.2



Part No.	Description	Length	Nipple	Wire Size mm
PB2524-30B	Steel Liner x 3mt	3.4mt	Brass Nipple	1.0-1.2
PB2524-40B	Steel Liner x 4mt	4.4mt	Brass Nipple	1.0-1.2
PB2524-50B	Steel Liner x 5mt	5.4mt	Brass Nipple	1.0-1.2



SGB 501W/555W/605W/SB 501W Auto

Part No.	Description	Length	Nipple	Wire Size mm
* PB5033-30	Steel Liner x 3mt	3.5mt	Moulded Nipple	1.0-1.2
* PB5033-40	Steel Liner x 4mt	4.5mt	Moulded Nipple	1.0-1.2
* PB5033-50	Steel Liner x 5mt	5.5mt	Moulded Nipple	1.0-1.2



PB5033-30B	Steel Liner x 3mt	3.5mt	Brass Nipple	1.0-1.2
PB5033-40B	Steel Liner x 4mt	4.5mt	Brass Nipple	1.0-1.2
PB5033-50B	Steel Liner x 5mt	5.5mt	Brass Nipple	1.0-1.2



* Denotes torch package standard wear part set-up

Liner Options 1.0-1.6mm

DGB/SGB/SGF 240A/250A/360A/SGB 380A/501W/SB 250A Auto/360A Auto/501W Auto SGA-LW155A/255A/305A/355A

Part No.	Description	Length	Nipple	Wire Size mm
PB2513-30	Teflon Liner x 3mt	3.6mt	Teflon Brass Nipple	1.0-1.2
PB2513-40	Teflon Liner x 4mt	4.6mt	Teflon Brass Nipple	1.0-1.2
PB2513-50	Teflon Liner x 5mt	5.6mt	Teflon Brass Nipple	1.0-1.2
PNE1564	Optional Brass Neck Liner	0.3mt	Teflon Brass Nipple	0.8-1.2



PB2564-30	Polyamide/Brass Liner x 4.7mm O/D x 3mt	3.6mt	Brass Nipple	1.2-1.6
PB2564-40	Polyamide/Brass Liner x 4.7mm O/D x 4mt	4.6mt	Brass Nipple	1.2-1.6
PB2564-50	Polyamide/Brass Liner x 4.7mm O/D x 5mt	5.6mt	Brass Nipple	1.2-1.6



Liner Options 1.2-1.6mm

DGB/SGB 360A/SGB 380A/SGA-LW355A

Part No.	Description	Length	Nipple	Wire Size mm
PB3631-30	Steel Liner x 3mt	3.4mt	Moulded Nipple	1.6
PB3631-40	Steel Liner x 4mt	4.4mt	Moulded Nipple	1.6
PB3631-50	Steel Liner x 5mt	5.4mt	Moulded Nipple	1.6



PB3631-30B	Steel Liner x 3mt	3.4mt	Brass Nipple	1.6
PB3631-40B	Steel Liner x 4mt	4.4mt	Brass Nipple	1.6
PB3631-50B	Steel Liner x 5mt	5.4mt	Brass Nipple	1.6



SGB 501W/555W/605W/SB 501W Auto

Part No.	Description	Length	Nipple	Wire Size mm
PB5034-30	Steel Liner x 3mt	3.5mt	Moulded Nipple	1.2-1.6
PB5034-40	Steel Liner x 4mt	4.5mt	Moulded Nipple	1.2-1.6
PB5034-50	Steel Liner x 5mt	5.5mt	Moulded Nipple	1.2-1.6



PB5034-30B	Steel Liner x 3mt	3.5mt	Brass Nipple	1.2-1.6
PB5034-40B	Steel Liner x 4mt	4.5mt	Brass Nipple	1.2-1.6
PB5034-50B	Steel Liner x 5mt	5.5mt	Brass Nipple	1.2-1.6



Liner Options 1.2-2.0mm

SGB 501W/555W/605W/SB 501W Auto/SGA-LW355A

Part No.	Description	Length	Nipple	Wire Size mm
PB3626-30	Teflon Liner x 3mt	3.6mt	Brass Nipple	1.2-1.6
PB3626-40	Teflon Liner x 4mt	4.6mt	Brass Nipple	1.2-1.6
PB3626-50	Teflon Liner x 5mt	5.6mt	Brass Nipple	1.2-1.6
PNE2564	Optional Brass Neck Liner	0.3mt	Brass Nipple	1.2-1.6



PB3564-30	Polyamide/Brass Liner x 4.7mm O/D x 3mt	3.6mt	Brass Nipple	1.6-2.0
PB3564-40	Polyamide/Brass Liner x 4.7mm O/D x 4mt	4.6mt	Brass Nipple	1.6-2.0
PB3564-50	Polyamide/Brass Liner x 4.7mm O/D x 5mt	5.6mt	Brass Nipple	1.6-2.0



Liner Options 2.0-2.4mm

DGB/SGB 360A/SGB 380A

Part No.	Description	Length	Nipple	Wire Size mm
PB4631-30B	Steel Liner x 3mt	3.5mt	Brass Nipple	2.0-2.4
PB4631-40B	Steel Liner x 4mt	4.5mt	Brass Nipple	2.0-2.4
PB4631-50B	Steel Liner x 5mt	5.5mt	Brass Nipple	2.0-2.4



SGB 501W/555W/605W

Part No.	Description	Length	Nipple	Wire Size mm
PB5035-30B	Steel Liner x 3mt	3.5mt	Brass Nipple	2.0-2.4
PB5035-40B	Steel Liner x 4mt	4.5mt	Brass Nipple	2.0-2.4
PB5035-50B	Steel Liner x 5mt	5.5mt	Brass Nipple	2.0-2.4



Liner Options 1.0-2.4mm

SGA-LW455A

Part No.	Description	Length	Nipple	Wire Size mm
* PB4531-30B	Steel Liner x 3mt	3.6mt	Brass Nipple	1.0-1.2
* PB4531-40B	Steel Liner x 4mt	4.6mt	Brass Nipple	1.0-1.2
* PB4531-50B	Steel Liner x 5mt	5.6mt	Brass Nipple	1.0-1.2



PB4532-30B	Steel Liner x 3mt	3.6mt	Brass Nipple	1.4-1.6
PB4532-40B	Steel Liner x 4mt	4.6mt	Brass Nipple	1.4-1.6
PB4532-50B	Steel Liner x 5mt	5.6mt	Brass Nipple	1.4-1.6



PB4533-30B	Steel Liner x 3mt	3.6mt	Brass Nipple	2.0-2.4
PB4533-40B	Steel Liner x 4mt	4.6mt	Brass Nipple	2.0-2.4
PB4533-50B	Steel Liner x 5mt	5.6mt	Brass Nipple	2.0-2.4



* Denotes torch package standard wear part set-up



WeldTronic

42-46 Micro Circuit Dandenong South
Victoria, 3175

Telephone: 03 9702 9366
Facsimile: 03 9702 9766